

Project/Location: _____

Contractor: _____

Date: _____

Prepared by: _____

Mini Retract-a-Lite

Fully Concealed, Easy to Retrofit



Typical Specification


Supply and install **Emergi-Lite Mini Retract-a-Lite**. The unit shall be designed to be completely concealed in walls with a cavity. The equipment shall consist of a metal housing containing two modules joined by a flexible bracket and electric conduit. One module contains the battery, charger circuitry and electrical connection box; the other module contains the emergency lights installed on the back of a door able to rotate 360°. The unit equipment shall be completely concealed in the wall, after the installation through a rectangular opening not larger than 8.25-in by 5.75-in. In stand-by mode, the only visible parts of the unit shall be the flat door and trim plate, coated with an off-white finish that can be customized on site with paint or other suitable wall covering. Upon a power failure the unit will expose the emergency heads by rotating its door 180° and then will power the lamps. At the restoration of the AC power or at the end of the battery discharge, the lamps will turn off and the unit will retract the heads by rotating the door.



The unit shall not require the presence of AC power in order to close the door. The door of the unit shall be easy to open or close by hand, in any rotation direction. The light source shall be 12V MR16 halogen lamps of specified wattage and light output. The unit shall supply the rated load for a minimum of 30 minutes or until the battery is discharged to 87 1/2% of its nominal voltage

(whichever duration is longer). The charger circuitry shall utilize a micro-controller that samples the battery in relation to the ambient temperature, state of charge, and input voltage fluctuations. The charger shall be current limited, temperature compensated and short-circuit proof. The circuit will charge in accordance with the CSA C22.2 – 141 requirements. The unit shall be furnished with a recessed, illuminated push button serving as test switch and status indicator light.

Dimensions

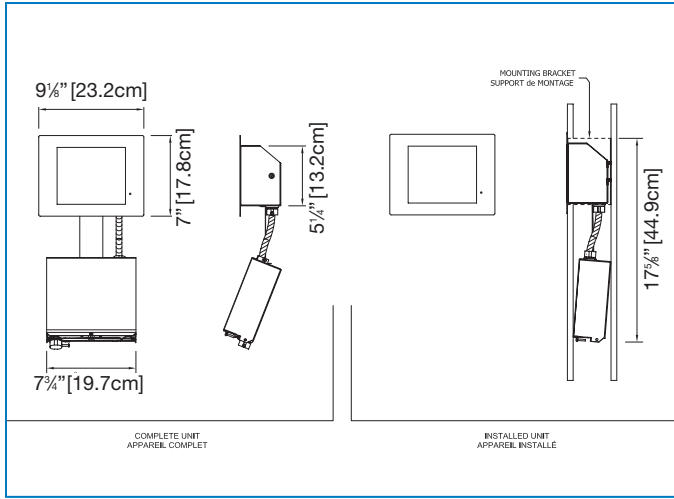

Auto diagnostic: the unit will come complete with the Emergi-Lite series of autodiagnostic micro-controller circuitry that will ensure the equipment readiness and reliability by continuously monitoring every critical function of the unit. If a component failure occurs, the pilot light on the front of the unit, will change color from green to red and will flash indicating a fault. A detailed diagnostic legend shall be available on the back of the door and shall provide fault identification.

The auto diagnostic shall simulate a power loss for one minute monthly, 10 minutes every sixth months, and a full 30-minute test every 12 months.

The equipment shall be Emergi-Lite model: _____.

Features

- Easy to retrofit in finished walls: the unit slides in through an 8.25-in by 5.75-in hole, open next to a wall stud
- No pre-installed back box
- Output: 12Vdc with up to 100 watts of power
- Direct connection to 120 or 347Vac power generators
- Emergency lights: MR16 halogen lamps; power range from 12 to 50 Watts
- Certification: CSA C22.2 No.50



Replacement Lamps

| Ordering Code | Type | Voltage-Wattage |
|---------------|----------------|-----------------|
| 580.0080-E | MR16 flood | 12V-12W |
| 580.0064-E | MR16 flood | 12V-20W |
| 580.0083-E | MR16 flood | 12V-35W |
| 580.0076-E | MR16 flood | 12V-50W |
| 580.0068-E | MR16 IR* flood | 12V-20W |
| 580.0090-E | MR16 IR* flood | 12V-35W |
| 580.0089-E | MR16 IR* flood | 12V-50W |

*High-output (H)

Ordering Information

| Series | Unit Capacity | A.C. Voltage | Lamp Wattage (12V MR16) | Options |
|-----------|---|---|---|--------------------------------|
| MR | G = Remote AC generator Max. 100W | Blank = 120Vac 2 = 277Vac 3 = 347Vac | /12 = 2x 12 watts MR16 /20 = 2x 20 watts MR16 /35 = 2x 35 watts MR16 /50 = 2x 50 watts MR16 /20H = 2x 20 watts MR16, High Lumen output /35H = 2x 35 watts MR16, High Lumen output /50H = 2x 50 watts MR16, High Lumen output | TB = T-bar mounting kit |

EXAMPLE: MRL80/20HUN