


New product

LEDDR-N Series Emergency LED driver

Convert new or existing LED fixtures into emergency lighting units with constant power emergency LED drivers

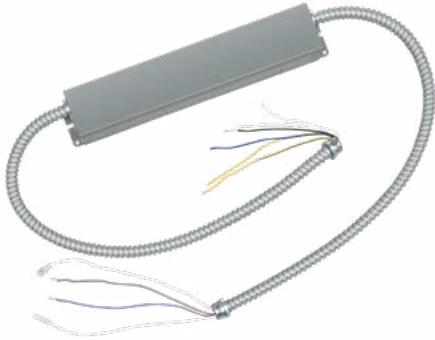

Housing

- Galvanized steel construction
- LED illuminated remote test switch

Mounting

- Suitable for installation on top or remotely (up to 20 feet)

Lamp types

- LED lamps with 20VDC to 50VDC operating voltage
- Can be wired for normally-on, normally-off or switched loads
- Lumen output depends on LED light source efficacy (lumens/watts)

Electronics

- Universal 120/277, 50/60Hz input
- Provides 90 minutes of emergency operation
- Surge protection: per C62.41 (TVS)
- Output classification: Class 2 compliant
- Output and input overcurrent protection
- Constant power supply in emergency mode

Battery

- Long-life, lithium battery
- 24 hour battery recharge time

Approvals

- Damp location listed
- UL classified for field 50°F to 122°F
- UL 924 approved, NFPA 101 Life Safety Code, NEC, and BC-California Energy Commission Title 20

Warranty (subject to proper installation and maintenance)

- Unit has a three year warranty
- Detailed warranty terms located on page 202 or online at:
www.emergi-lite.com/usa/files/EL_Warranty.pdf



Important note

LEDDR SERIES system coordination guidelines

These guidelines were developed to allow the lighting system designer/specifier to predict the operating performance levels of LED luminaires when powered by an electrically compatible LEDDR Series model. It is ultimately the responsibility of the designer/specifier to ensure that the as installed system delivers code-compliant path of egress illumination.

1. Determine electrical compatibility

- Verify that the Luminaire LED Driver, where applicable, is Class 2 compliant.
- Verify that the Luminaire LED Lamp(s) have an operating voltage between 20Vdc and 50Vdc.
- Verify that the Luminaire LED Lamp(s) have a power rating equal to, or greater than, the emergency power rating of the LEDDR model under consideration.

Calculate lumen output during emergency operation


- Lumen output= Efficacy (lumen/watt) X emergency LED driver wattage
- In order to understand luminaire efficacy:
 - Access luminaire data by logging onto DesignLites Consortium
www.designlights.org
 - Select 'Search the DLC Qualified Product List' on the DLC homepage
 - Enter manufacturer name and P/N of luminaire under consideration in the 'search by keyword' text window
 - Select 'Search' tab to open the 'Qualified Products List'
 - Determine luminaire lumens per watt efficacy in 'Rated Data' specifications
 - Multiply luminaire lumens per watt by emergency output of the 'LED Driver' model under consideration

Electrical Information

Series	Output	Input
LEDDR-11-N	11W	5.7W
LEDDR-14-N	13.7W	6.9W

Dimensions

Dimensions are approximate and subject to change.

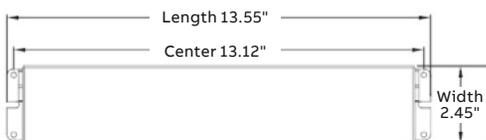

How to order

Series	Wattage
LEDDR-	11-N 14-N
Example: LEDDR-14-N	