

DLM-2 Series Decorative Emergency Lighting Unit



WARNING:
Risk of Shock.
Disconnect Power before Installation.



IMPORTANT SAFEGUARDS

When using electrical equipment, basic safety precautions should always be followed including the following:

READ AND FOLLOW ALL SAFETY INSTRUCTIONS

1. All servicing should be performed by qualified service personnel.
2. All unused wires must be insulated to prevent shorting.
3. Do not use outdoors.
4. Do not let power supply cords touch hot surfaces.
5. Do not mount near gas or electric heaters.
6. Use caution when handling batteries. Battery acid can cause burns to the skin and eyes. If acid is spilled on the skin or eyes, flush affected area with fresh water and contact a physician immediately.
7. Avoid possible shorting.
8. Equipment should be mounted in locations and at heights where it will not readily be subjected to tampering by unauthorized personnel.
9. The use of accessory equipment not recommended by the manufacturer may cause an unsafe condition.
10. Do not use this equipment for other than intended use.
11. When relamping, only use lamps specified in the fixture.
12. Allow battery to charge for 24 hours before first use.

SAVE THESE INSTRUCTIONS

Installation Instructions



IMPORTANT: Install product no higher than the maximum mounting height of 7 feet 6 inches from the floor.

1. Turn of AC power.
2. Using a flat head screwdriver, insert the blade into the slot and gently pry off the back plate (see figure 2).

Wall and Ceiling Mount

1. Remove the appropriate knockouts in the back plate to mount to a standard junction box.
2. Feed unit wires through the center hole of the back plate.
3. Make the proper connections (see figure 4):
 - a. For 120VAC, connect the black wire (120Vac) and white wire (neutral) to the building utility.
 - b. For 277VAC, connect the orange wire (277Vac) and white wire (neutral) to the building utility.
 - c. Feed wires back into the junction box.
4. Mount and secure the back plate to the junction box.
5. Connect the red wire to the battery positive terminal (see figure 3).
6. Snap housing to back plate.
7. Restore power and press the test button.

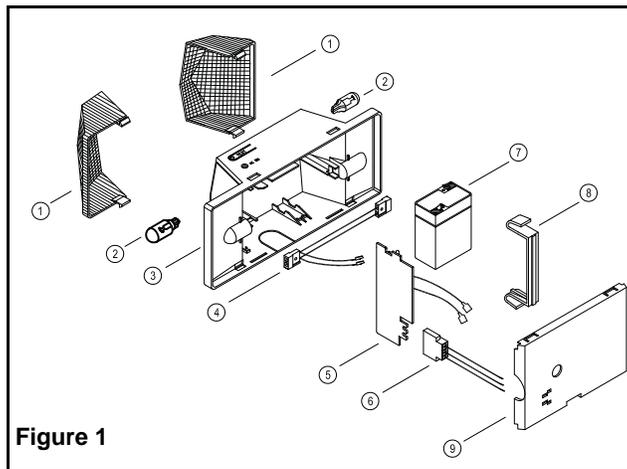


Figure 1

Parts list

- | | |
|------------------|--------------------|
| 1. Lens | 6. Power connector |
| 2. Lamp bulbs(2) | 7. Battery |
| 3. Housing | 8. Battery bracket |
| 4. Lamp holder | 9. Back plate |
| 5. PCBA board | |

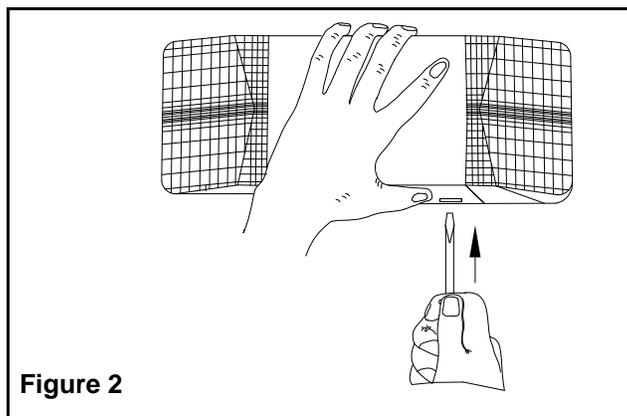


Figure 2

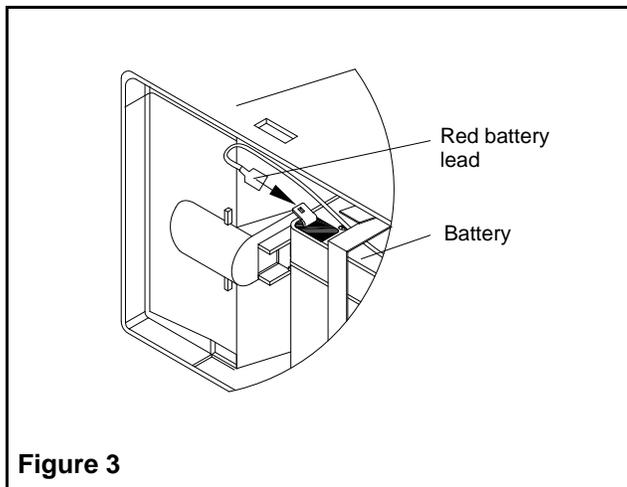


Figure 3

Wall mount Conduit entry

1. Remove the top knockout on the top flange of the fixture (see figure 5).
2. Remove keyhole knockouts on the back plate and mount to the wall.
3. Secure conduit to knockout and feed wires into the fixture.
4. Make the proper connections (see figure 5):
 - a. For 120VAC, connect the black wire (120Vac) and white wire (neutral) to the building utility.
 - b. For 277VAC, connect the orange wire (277Vac) and white wire (neutral) to the building utility.
5. Connect the red wire to the battery positive terminal (see figure 3).
6. Snap housing to back plate.
7. Restore power and press the test button.

Relamping

1. Snap off to remove lens.
2. Refer to the relamping information located near lamp holder for recommended maximum wattage. Do not exceed this wattage.
3. Install the bulb.
4. Reinstall the lens.

Maintenance

None required. Replace the batteries as needed according to ambient conditions. Equipment must be tested regularly in accordance with local codes.

