



EX35F Series

Full Recessed Edge-Lit Exit Sign

Project/Location:
Contractor:
Date:
Prepared by:

Features

- Low-profile trim enables exit signs to be mounted in areas where space is restricted
- Modular retainer clips allow “snap-in” installation of face panel after installation of back box
- LED edge-lit, extruded acrylic face panels with precision-etched lettering
- Energy efficient – consumes less than 4.5 watts in AC or DC mode



Typical Specification


Supply and install the Emergi-lite **EX35F Series** LED edge-lit exit sign. The equipment shall operate with universal two-wire AC input voltage from 120Vac to 347Vac at less than 4.5 watts and universal two-wires DC input voltage from 6Vdc to 48Vdc at less than 2.5 watts for single and double face signs. The trim assembly shall be fabricated of die cast aluminum and consist of a universal satin-coated steel back box. The back box shall be provided with conduit knockouts on top, back, and end. The trim plate shall attach to the housing assembly with two (2) torsion spring retainers thereby eliminating all visible screws or hardware. The LED light strip shall be contained within the trim plate. Red LED technology shall be **ALINGAP**. The polished acrylic face panel shall have precision etched 6" high and 3/4" inch stroke red letters with a white, clear or mirror background. The equipment shall be provided with bar hangers to facilitate installation.

The exit sign in a self-powered configuration shall stay illuminated during emergency operation for at least 90 minutes upon AC failure.

The equipment shall be certified CSA-C860.

The equipment shall be Emergi-lite model: _____.

Dimensions

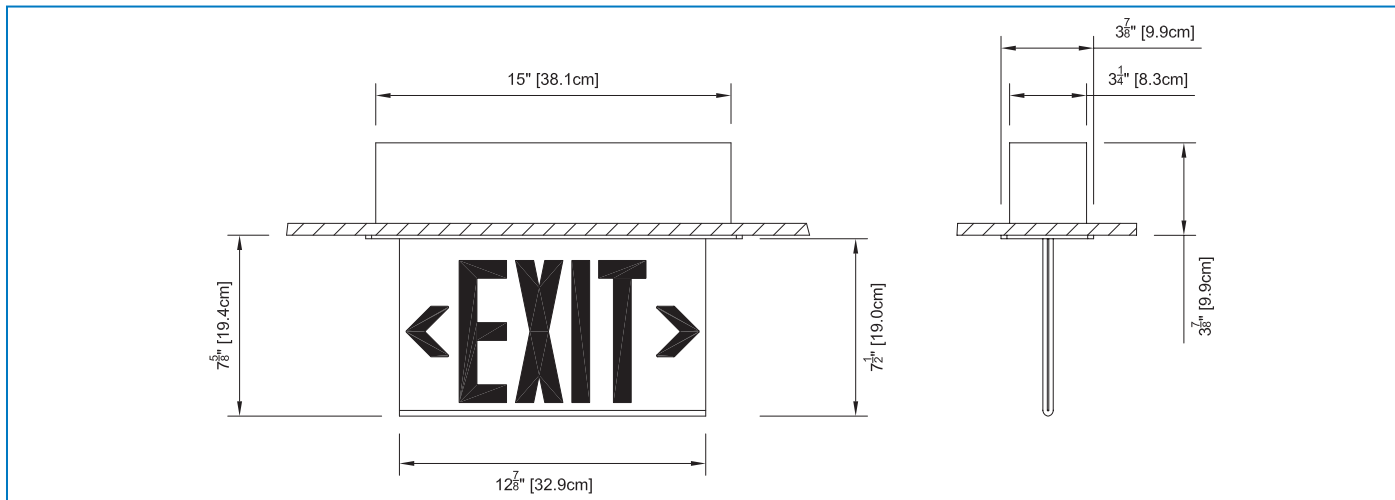

Power Consumption

Model	AC Specs		DC Specs	
AC/DC red	120 to 347Vac	Less than 4.5W	6 to 48Vdc	Less than 2.5W
AC/DC green	120 to 347Vac	Less than 2.5W	6 to 48Vdc	Less than 1.5W
Self-powered red	120 to 347Vac	Less than 5W	NiCad battery	Min. 90 minutes
Self-powered green	120 to 347Vac	Less than 4W	NiCad battery	Min. 90 minutes

Ordering Information

Series	Housing Colour	Voltage	Faceplate Colour	Chevrons
EX36F = single face, recessed, flat trim EX37F = double face, recessed, flat trim	W = factory white B = black BA = brushed aluminum CH = chrome PB = polished brass BR = bronze	-U = 120-347Vac, 6-48Vdc -UI = self-powered, 120-347Vac -ID = self-powered, 120-347Vac c/w auto diagnostics	-RC = red/clear* -RW = red/white -RM = red/mirror -GC = green/clear* -GW = green/white -GM = green/mirror	Blank = no chevrons -AL = chevron left -AR = chevron right -DA = double chevrons -A = one chevron each side, double face
			* Not available on double face	

EXAMPLE: EX36FW-U-RC