



# Surface Mounted Series

## Remote Emergency Lighting Fixtures

Project/Location: \_\_\_\_\_

Contractor: \_\_\_\_\_

Date: \_\_\_\_\_

Prepared by: \_\_\_\_\_

### EF18/EF18D/EF18T

#### Features

- Single, double or triple head
- Positive aim swivel
- Certified CSA C22.2 No.250



#### Wire Guards

460.0035-E	Wall Mount (EF18)
460.0082-E	Wall Mount (EF18D)
460.0078-E	Wall Mount (EF18T)

#### Replacement Lamps

Model	Lamp Type	Voltage-Wattage
570.0016-E	Mini Tungsten, Wedge base	6V - 9W
570.0025-E	Tungsten, Wedge base	12V - 9W
580.0023-E	Halogen (quartz), Bi-pin	24V - 20W

See the complete list page 91

#### Dimensions

Fixture	Length	Height	Depth	Canopy
EF18:	4 3/4" (12.7 cm)	7 7/8" (18.7 cm)	4 3/4" (10.5 cm)	5.0" (12.7 cm) Diameter
EF18D:	11 1/2" (28.2 cm)	6 3/4" (16.8 cm)	4 3/4" (10.5 cm)	Canopy: 5" (12.7 cm) Diameter
EF18T:	14 3/4" (37.8 cm)	6 3/4" (16.2 cm)	14 3/4" (37.8 cm)	Canopy: 9.5" (24.1 cm) Diameter



#### Ordering Information


Series	Lamp Style	Colour	Lamp Type, Voltage and Wattage	Options*	
<b>EF18=</b> single, par 36 <b>EF18D=</b> double, par 36 <b>EF18T=</b> triple, par 36	<b>Blank=</b> tungsten <b>Q=</b> halogen <b>S=</b> sealed beam <b>H=</b> quartz sealed beam	<b>Blank=</b> factory white <b>B=</b> black <b>C=</b> chrome <b>M=</b> factory white (metal)	<b>-6V9W=</b> 6V - 9 watts, tungsten, wedge base <b>-6V __ W=</b> 6V - 18 or 25 watts, tungsten, D.C.B. <b>-12V __ W=</b> 12V - 9 or 18 watts, tungsten, wedge base <b>-12V25W=</b> 12V - 25 watts, tungsten, D.C.B. <b>-24V __ W=</b> 24V - 9 or 18 watts, tungsten, wedge base <b>-24V25W=</b> 24V - 25 watts, tungsten, D.C.B. <b>-6V __ W=</b> 6V - 8, 12, or 20 watts, halogen, quartz bi-pin <b>-12V __ W=</b> 12V - 8, 12, 20 or 55 watts, halogen, quartz bi-pin <b>NOTE:</b> " __ " = insert wattage required *Only available with metal head.	<b>-24V __ W=</b> 24V - 20 or 70 watts, halogen, quartz bi-pin <b>-6V __ W=</b> 6V - 9, 12, 18 or 25 watts, tungsten, sealed beam <b>-12V __ W=</b> 12V - 12, 18 or 25 watts, tungsten, sealed beam <b>-6V __ W=</b> 6V - 8, 12 or 20 watts, halogen, quartz sealed beam <b>-12V __ W=</b> 12V - 8, 12 or 37 watts halogen, quartz sealed beam <b>-32V __ W=</b> 32V - 18 or 25 watts, tungsten, D.C.B. <b>-120V __ W=</b> 120V, tungsten, D.C.B. <b>-120V35W=</b> 120V35watts, halogen, D.C.B. <b>-120V50W=</b> 120V - 50 watts, quartz, D.C.B. *	<b>FP=</b> teflon coated lens

EXAMPLE: EF18Q-12V12W

### EF26/EF26DS/EF26D

#### Features

- Cubic, vandal-resistant surface-mounted fixture
- Single, double or twin cube with center body
- Frosted polycarbonate cube
- Certified CSA C22.2 No.250

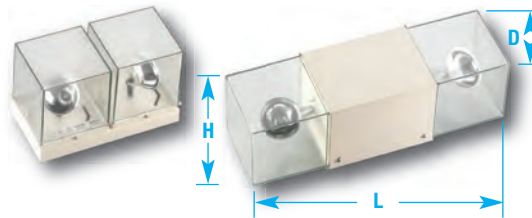

#### Wire Guards

460.0035-E	Wall Mount (EF26)
460.0100-E	Wall Mount (EF26D)
460.0032-E	Wall Mount (EF26T)

#### Replacement Lamps

Model	Lamp Type	Voltage-Wattage
570.0016-E	Mini Tungsten, Wedge base	6V - 9W
580.0011-E	Mini Halogen (quartz), Bi-Pin	6V - 12W
580.0079-E	MR16, Flood	6V - 10W

See the complete list page 91

#### Dimensions

Fixture	Length	Height	Depth
RSQB	4 3/4" (12.1 cm)	4 7/8" (12.4 cm)	4 3/4" (12.1 cm)
RSQBD	9 1/2" (24.1 cm)	5 7/8" (14.9 cm)	4 3/4" (12.1 cm)
RSQB2	14 3/4" (37.4 cm)	4 3/4" (12.1 cm)	4 3/4" (12.1 cm)



#### Ordering Information

Series	Lamp Style	Colour	Lamp Style and Wattage	Options*
<b>EF26=</b> single cube <b>EF26D=</b> double cube <b>EF26DS=</b> twin cube	<b>Blank=</b> tungsten <b>Q=</b> halogen <b>M=</b> MR16	<b>Blank=</b> factory white <b>B=</b> black	<b>-6V9W=</b> 6V - 9 watts, wedge base <b>-12V9W=</b> 12V - 9 watts, wedge base <b>-12V18W=</b> 12V - 18 watts, wedge base <b>-24V9W=</b> 24V - 9 watts, wedge base <b>-6V8W=</b> 6V - 8 watts, quartz bi-pin <b>-6V12W=</b> 6V - 12 watts, quartz bi-pin <b>-12V8W=</b> 12V - 8 watts, quartz bi-pin <b>-12V12W=</b> 12V - 12 watts, quartz bi-pin <b>-12V20W=</b> 12V - 20 watts, quartz bi-pin <b>-24V20W=</b> 24V - 20 watts, quartz bi-pin <b>6V6W=</b> 6V - 6 watts, MR16 <b>6V10W=</b> 6V - 10 watts, MR16 <b>12V12W=</b> 12V - 12 watts, MR16 <b>12V20W=</b> 12V - 20 watts, MR16 <b>12V35W=</b> 12V - 35 watts, MR16 <b>12V50W=</b> 12V - 50 watts, MR16 <b>24V20W=</b> 24V - 20 watts, MR16 <b>24V35W=</b> 24V - 35 watts, MR16 <b>24V50W=</b> 24V - 50 watts, MR16	<b>Blank=</b> no options <b>TP=</b> tamper proof screws <b>690.0454-E=</b> Tamper proof bit*  *One bit per order.

EXAMPLE: EF26Q-TP-6V8W