

Premier™ Exit Series

Specification-grade, LED, thermoplastic, snap together exit sign



Construction

- White or black UV stabilized thermoplastic enclosure
- 6 inch EXIT lettering legend, available in red or green
- Field-selectable chevrons

Mounting

- Surface mount
- Canopy included for end or ceiling mount applications
- Universal J-box mounting

Special wording panels

- Available. Contact your sales representative with your design requirements

Electronics

- Optional Advanced Diagnostics
- Optional Nexus® monitoring system
- 120/277 60Hz

Approvals

- UL 924 listed
- Damp location (50°F to 104°F)
- Meets NFPA101 (Life Safety Code), NFPA 70 NEC, OSHA illumination standards


Warranty

- Unit has a five-year limited warranty
Detailed warranty terms located on page 178 or online at:
www.emergi-lite.com/usa/files/EL_Warranty.pdf

Power consumption

Model		AC specs		DC specs
AC-only	120/277VAC, 60Hz	Less than 2.5W	–	–
AC/DC-remote	120/277VAC, 60Hz	Less than 2W	6 to 48VDC	Less than 1.5W
Self-powered	120/277VAC, 60Hz	Less than 3.3W	Ni-Cd battery	Min. 90 minutes
Self-powered diagnostic	120/277VAC, 60Hz	Less than 2.8W	Ni-Cd battery	Min. 90 minutes

Housing color




White



Black

Dimensions

Dimensions are approximate and subject to change.

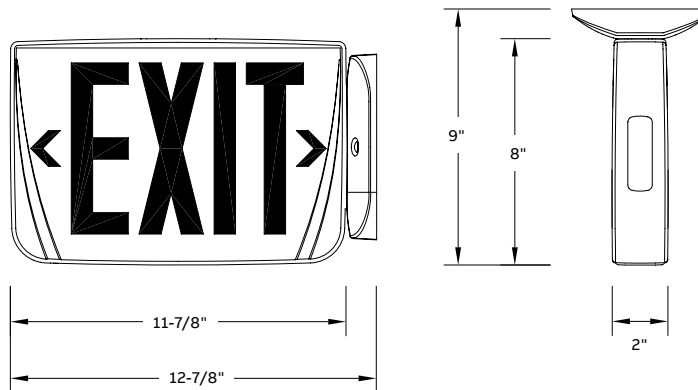

Wire guards

Wall	Ceiling	End
WG1-E	WG5-E	WG5-E

Accessories (order as a separate item)

Description	Suffix
Pendant white	PRE-P-WH ¹
Pendant black	PRE-P-BK ¹
Wire guard (wall mount)	WG1-E
Wire guard (ceiling mount and end mount)	WG5-E

¹Specify pendant length in inches

How to order

Housing color	Series	Unit type	Color	Options
W= White B= Black	PREM= LED plastic EXIT	AC= AC only (120/277V) 2C1= Dual AC circuit (2x120V) 2C2= Dual AC circuit (2x277V) U= 120/277VAC & 6 to 48VDC SNX= Self-powered Ni-Cd DN= Self-powered advanced diagnostic circuitry NEX= NEXUS® wired NEXRF= NEXUS® wireless	R= Red universal G= Green universal Open face RW= Red on white GW= Green on white (Open face required with special wording legends)	Blank = No option BA = Brushed aluminum exit stencil FA = Fire alarm activated flasher (AC, U, 2C1, 2C2 and DN models only) FBF = Flasher buzzer + fire alarm activated flasher (DN model only) FL = Flasher FZ = Flasher buzzer (DN model only) 1-VR = Single face vandal-resistant screws ¹ 2-VR = Double face vandal resistant screws ¹ 1-VR1 = Single face polycarbonate shield with tamper proof screws ¹ 2-VR1 = Double face polycarbonate shield with tamper proof screws ¹

Example: WPREMACR

¹Please specify single or double face, red or green