


LED EMERGENCY LIGHT

Use Flexible Conduit Only





WARNING:
Risk of Shock.
Disconnect Power before Installation.



IMPORTANT SAFEGUARDS

When using electrical equipment, basic safety precautions should always be followed including the following:

READ AND FOLLOW ALL SAFETY INSTRUCTIONS

1. All servicing should be performed by qualified service personnel.
2. Disconnect power at fuse or circuit breaker before installing or servicing.
3. All electrical connections must be in accordance with local codes, ordinances and the National Electric code.
4. All unused wires must be insulated to prevent shorting.
5. Do not use outdoors.
6. Do not let power supply cords touch hot surfaces.
7. Do not mount near gas or electric heaters.
8. Equipment should be mounted in locations and at heights where it will not readily be subjected to tampering by unauthorized personnel.
9. The use of accessory equipment not recommended by the manufacturer may cause an unsafe condition.
10. Do not use this equipment for other than intended use.
11. Use caution when handling batteries. Battery acid can cause burns to the skin and eyes. If acid is spilled on the skin or eyes, flush affected area with fresh water and contact a physician immediately.
12. Allow battery to charge for 24 hours before first use.

SAVE THESE INSTRUCTIONS

Installation Instructions



IMPORTANT:

Install product no higher than the maximum mounting height listed below:
Standard Output: 35 feet from floor.
High Output: 50 feet from floor.

1. Turn off AC power.
2. Using a flat head screwdriver, insert the blade into the two slots and pry off the front cover (see figure 1).

Wall and Ceiling Mount (see figure 2 & 3)

1. Remove the appropriate knockouts in the back plate.
2. Feed wires through the center hole of the back plate.
3. Mount and secure the back plate to the junction box.
4. Make the proper connections (see figure 5):
 - a. Connect the black wire (120/277Vac) and white wire (neutral) to the building utility.
 - b. Feed wires back into the junction box.
5. Connect battery connector (see figure 2).

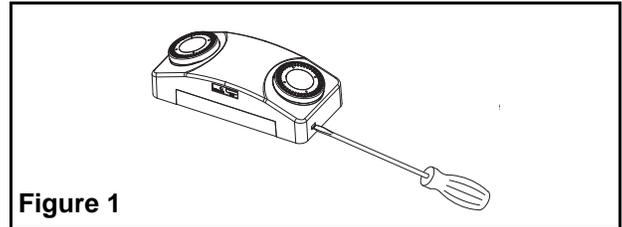


Figure 1

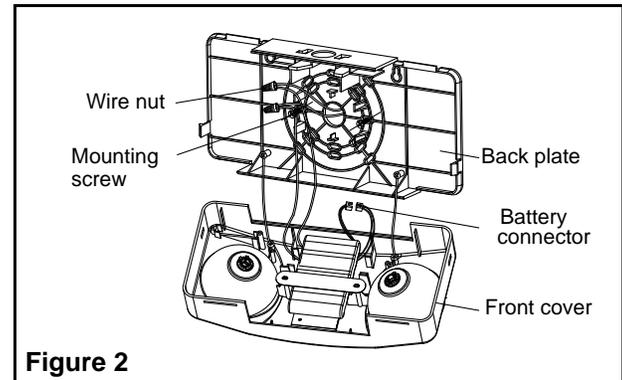


Figure 2

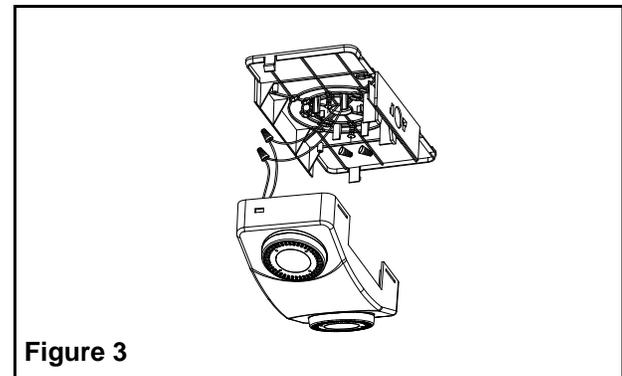


Figure 3

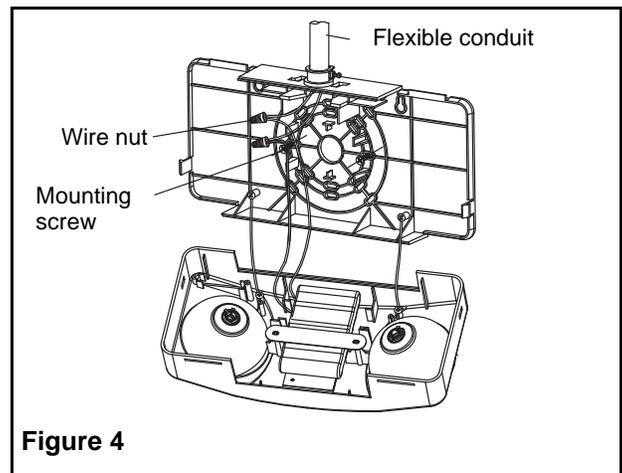


Figure 4

6. Snap the front cover onto the back plate.
7. Restore power and press the test button. LED heads will turn on.
8. Adjust the lamp head direction as needed.

Wall mount Conduit entry

1. Remove the top knockout on the top flange of the fixture (see figure 4).
2. Remove keyhole knockouts on the back plate and mount to the wall.
3. Secure flexible conduit to knockout and feed wires into the fixture.
4. Make the proper connections (see figure 5):
 - a. Connect the black wire (120/277Vac) and white wire (neutral) to the building utility.
5. Connect battery connector (see figure 2).
6. Snap the front cover onto the back plate.
7. Restore power and press the test button. LED heads will turn on.
8. Adjust the lamp head direction as needed.

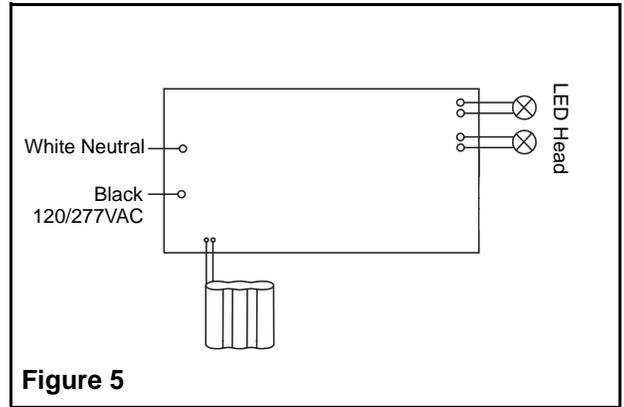


Figure 5

Maintenance

None required. Replace the batteries as needed according to ambient conditions. Equipment must be tested regularly in accordance with local codes.

Note:

It is normal for the LED indicator to blink in short intervals once the battery is fully charged.

This unit comes with a (3) three year limited warranty.