

EFR Distinction™ Remote Collection

Recessed Designer Series

Safety and security have never looked so good

The **EFR Distinction™ Remote Collection** emergency fixtures have been specially built to meet the needs of contemporary decor professionals. Take a look at these fixtures and discover for yourself an entirely new design vocabulary of emergency lighting function and form.

Features

- Contemporary, enduring designs
- A selection of attractive styles and shades
- Highly-resistant powder-coated, die cast aluminum construction
- Ultra energy efficient and light-intensive MR16 quartz halogen lamps
- 6W, 10W, 12W, 20W, 35W, and 50W availability
- Narrow beam light source





Project/Location: _____

Date: _____

Contractor: _____

Prepared by: _____

EFR Distinction™ Remote Collection




Typical Specification

The contractor will supply and install Emergi-lite **Distinction™ Series** Model - _____ recessed heads and Model - _____ housing. Recessed heads will be constructed of a durable powder coated, die cast aluminum construction and use MR16 halogen light sources.

The light source will be _____ volts, _____ watts MR16 halogen narrow beam or otherwise specified. The remote lighting fixtures will provide illumination in emergency operation and receive their DC power according to the load provided by Emergi-lite battery unit Model - _____. The duration of the DC back up will be _____ minutes according to the building code having jurisdiction in the geographical location where the recessed heads will be installed.

Dimensions

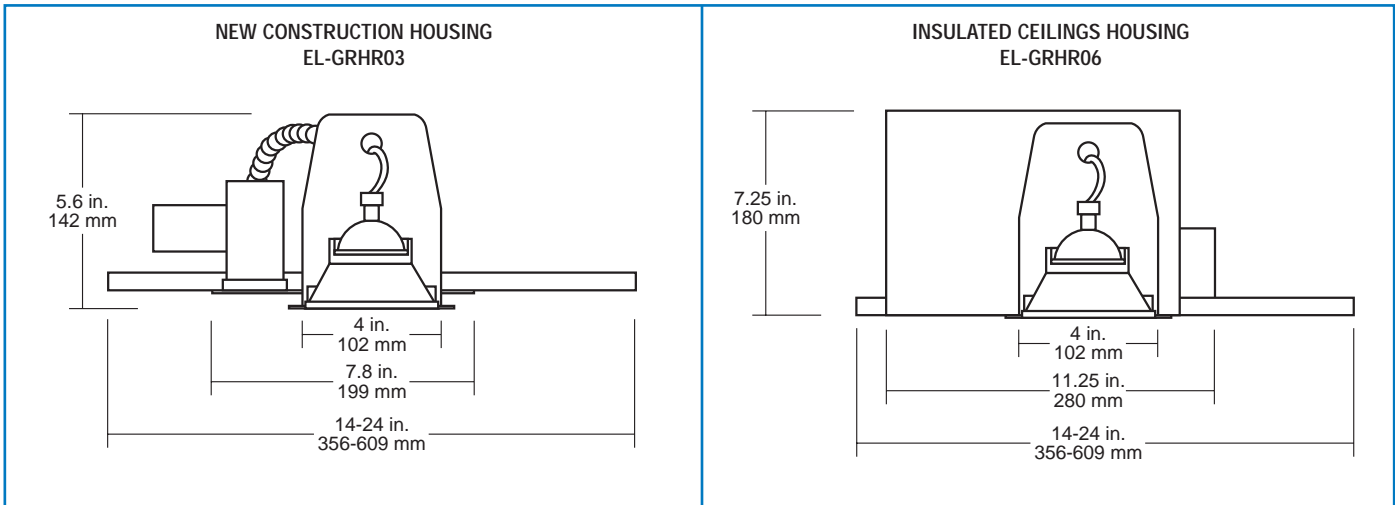

Ordering Information - Recessed Heads

Series	Head Style	Colour	Voltage/Wattage
EFR= decorative recessed remote	8NB= flat	WH= white	-MI= 6V - 6 watts, MR16
	8R= concave	BK= black (8R, 9 & 2 series only)	-MJ= 6V - 10 watts, MR16
	9= concave	BN= brushed nickel (8R, 8NB & 2 series only)	-MK= 12V - 12 watts, MR16
	2= pop-out	CH= chrome (2 series only)	-MA= 12V - 20 watts, MR16
		PB= polished brass (2 series only)	-MB= 12V - 35 watts, MR16
			-MC= 12V - 50 watts, MR16
			-MD= 24V - 20 watts, MR16
			-ME= 24V - 35 watts, MR16
		-MF= 24V - 50 watts, MR16	

EXAMPLE: EFR8NBBNMA

Ordering Information - Housing

EL-GRHR03	= new construction
EL-GRHR06	= insulated ceilings