



EFR Distinction Remote Collection

Recessed Designer Series

Project/Location:
Contractor:
Date:
Prepared by:

Features


- Contemporary, enduring designs
- 6W, 10W, 12W, 20W, 35W, and 50W availability
- Wide beam MR16 light source
- Will blend in with regular decorative recessed fixtures
- Choice of housing for new construction or insulated ceiling
- EFR8NB and EFR8R are made of powder coated or electro-plated steel
- EFR9 and EFR2 are made of die-cast
- Certified CSA C22.2 No.250



Housing for recessed remote

Model #	Description
EL-GRH03= non insulated ceilings	New construction (pre drywall)
EL-GRH04= non insulated ceilings	New construction (post drywall)
EL-GRH06= insulated ceilings	New construction (pre drywall)

Dimensions

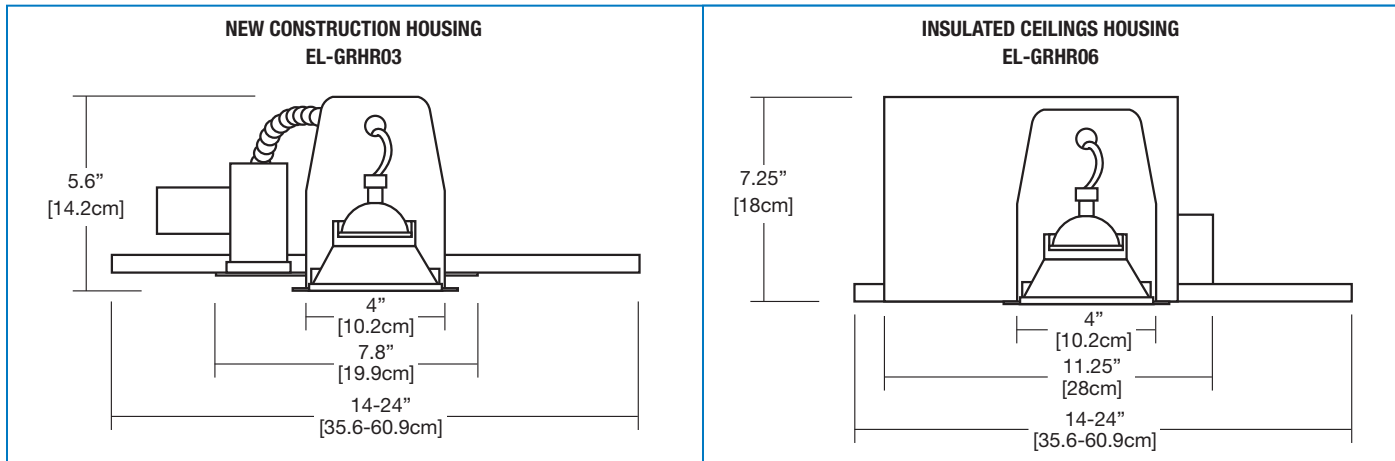

Replacement Lamps

Model	Lamp Type	Voltage-Wattage
580.0079-E	MR16-Flood	6V - 10W
580.0080-E		12V - 12W
580.0077-E		24V - 20W

See the complete list page 91

Ordering Information

Series	Head Style	Colour	Voltage and Wattage
EFR= decorative recessed remote	8NB= flat 8R= concave 9= concave 2= pop-out	WH= white BK= black (8R, 9 & 2 series only) BN= brushed nickel (8R, 8NB & 2 series only) CH= chrome (2 series only) PB= polished brass (2 series only)	-6V6W= 6V - 6 watts, MR16 -6V10W= 6V - 10 watts, MR16 -12V12W= 12V - 12 watts, MR16 -12V20W= 12V - 20 watts, MR16 -12V35W= 12V - 35 watts, MR16 -12V50W= 12V - 50 watts, MR16 -24V12W= 24V - 12 watts, MR16 -24V20W= 24V - 20 watts, MR16 -24V35W= 24V - 35 watts, MR16 -24V50W= 24V - 50 watts, MR16 -120V20W= 120V-20watts, GU10* -120V35W= 120V-35watts, GU10* -120V50W= 120V-50watts, GU10* *available in "8R & 9"series only

EXAMPLE: EFR8NBBNMA