

# Recess Mounted Series

## Remote Emergency Lighting Fixtures



### EF15 Series

- PAR 36, recess mounted fixtures with gimbal ring
- Durable thermoplastic trim ring standard; metal trim available as an option
- Available in factory white (standard) and black
- Gimbal ring adjustable on two planes to 45 degrees



### EF20 Series

- RHT, semi-recessed, miniature eyeball fixture
- Durable, baked enamel metal trim
- Available in factory white
- Head adjustable on two planes of vertical and horizontal rotation



### EF17 Series

- PAR 36, semi-recessed, eyeball fixture
- Durable, brushed aluminum trim
- Head adjustable on two planes of vertical and horizontal rotation



### EF21R Series

- Square, recessed metal fixture with a choice of lamps
- Trim colour is factory white

Project/Location:





Date:

Contractor:

Prepared by:

# Recess Mounted Series

## Dimensions

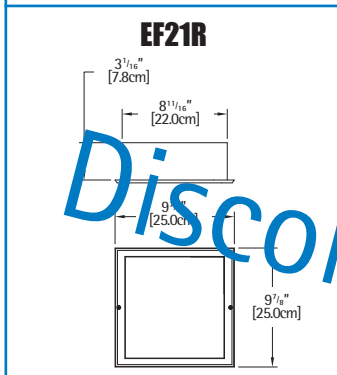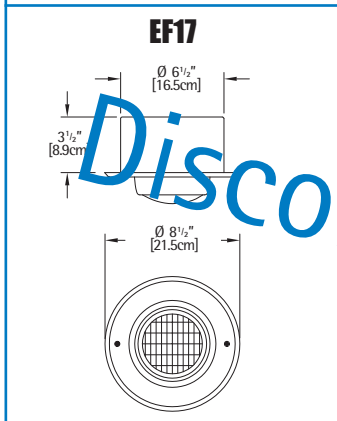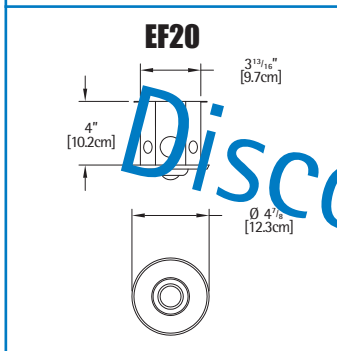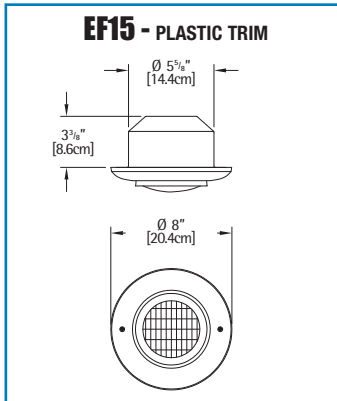

## Ordering Information

Series	Lamp Type	Housing	Options	Colour	Voltage/Wattage/Lamp Type
EF15= par 36 recessed	Blank= tungsten	Blank= plastic trim	Blank= no options	Blank= factory white	-6V9W= 6V - 9 watts, tungsten, wedge base
	H= quartz sealed beam	M= metal trim	NB= less back box	B= black	-6V __ W= 6V - 18 or 25 watts, tungsten, D.C.B.
	Q= halogen				-12V __ W= 12V - 9 or 18 watts, tungsten, wedge base
	S= sealed beam				-12V25W= 12V - 25 watts, tungsten, D.C.B.
					-24V __ W= 24V - 9 or 18 watts, tungsten, wedge base
					-24V25W= 24V - 25 watts, tungsten, D.C.B.
					-6V __ W= 6V - 8, 12, or 20 watts, halogen, quartz bi-pin
					-12V __ W= 12V - 8, 12, 20 or *55 watts, halogen, quartz bi-pin
					-24V __ W= 24V - 20 or *70 watts, halogen, quartz bi-pin
					-6V __ W= 6V - 9, 12, 18 or 25 watts, tungsten, sealed beam
					-12V __ W= 12V - 12, 18 or 25 watts, tungsten, sealed beam
					-6V __ W= 6V - 8, 12 or 20 watts, halogen, quartz sealed beam
					-12V __ W= 12V - 8, 12 or *37 watts halogen, quartz sealed beam
					-32V __ W= 32V - 18 or 25 watts, tungsten, D.C.B.
					-120V __ W= 120V - 10, 15, *30 or *50 watts, tungsten, D.C.B.
					*NOTE: " __ " = insert wattage required
					* Available with metal trim only

EXAMPLE: EF15Q-12V12W

Series	Lamp Type/Voltage/Wattage
EF20= semi-recessed	-6V20W= 6V - 20 watts, tungsten, S.C.B.
miniature globe	-12V20W= 12V - 20 watts, tungsten, S.C.B.
	-24V20W= 24V - 20 watts, tungsten, S.C.B.

EXAMPLE: EF20-6V20W

Series	Lamp Type	Options	Voltage/Wattage/Lamp Type
EF17= par 36, semi-recessed	Blank= tungsten	Blank= no options	-6V9W= 6V - 9 watts, tungsten, wedge base
	H= quartz sealed beam	NB= less back box	-6V __ W= 6V - 18 or 25 watts, tungsten, D.C.B.
	Q= halogen		-12V __ W= 12V - 9 or 18 watts, tungsten, wedge base
	S= sealed beam		-12V25W= 12V - 25 watts, tungsten, D.C.B.
			-24V __ W= 24V - 9 or 18 watts, tungsten, wedge base
			-24V25W= 24V - 25 watts, tungsten, D.C.B.
			-6V __ W= 6V - 8, 12, or 20 watts, halogen, quartz bi-pin
			-12V __ W= 12V - 8, 12, 20 or *55 watts, halogen, quartz bi-pin
			-24V __ W= 24V - 20 or *70 watts, halogen, quartz bi-pin
			-6V __ W= 6V - 9, 12, 18 or 25 watts, tungsten, sealed beam
			-12V __ W= 12V - 12, 18 or 25 watts, tungsten, sealed beam
			-6V __ W= 6V - 8, 12 or 20 watts, halogen, quartz sealed beam
			-12V __ W= 12V - 8, 12 or *37 watts halogen, quartz sealed beam
			-32V __ W= 32V - 18 or 25 watts, tungsten, D.C.B.
			-120V __ W= 120V - 10, 15, *30 or *50 watts, tungsten, D.C.B.
			*NOTE: " __ " = insert wattage required

EXAMPLE: EF17Q-12V12W

Series	Trim Colour	Lamp Type	Voltage/Wattage/Lamp Type
EF21R= recessed decorative square	Blank= factory white	Blank= tungsten	-6V8W= 6V - 8 watts, halogen, quartz bi-pin
		Q= halogen	-6V9W= 6V - 9 watts, tungsten, wedge base
			-6V12W= 6V - 12 watts, halogen, quartz bi-pin
			-12V8W= 12V - 8 watts, halogen, quartz bi-pin
			-12V9W= 12V - 9 watts, tungsten, wedge base
			-12V12W= 12V - 12 watts, halogen, quartz bi-pin
			-12V18W= 12V - 18 watts, tungsten, wedge base
			-24V9W= 24V - 9 watts, tungsten, wedge base
			-24V18W= 24V - 18 watts, tungsten, wedge base

EXAMPLE: EF21R-12V9W