


Linear Fluorescent Emergency Ballast

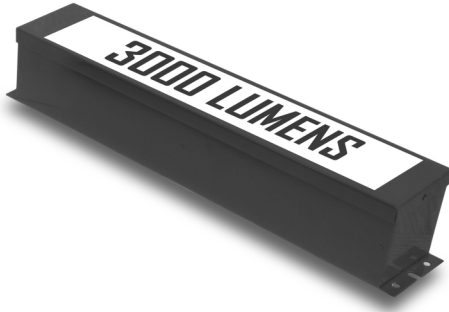

FPS-HL Series

Listed to UL924 standard

- Meets or exceeds all NEC and Life Safety Code
 Emergency Lighting Requirements.

Sealed Maintenance-Free Batteries

- Long life high temperature Ni-Cad.
- Painted steel case.
- Dual voltage 120/277V, 60Hz.

Controls

- Includes test switch and charge indicator accessory kit.
- Selectable lamp leads for optimizing light output for desired lamp type.




Technical Specifications

Input Voltage.....	120/277V, 60Hz
Input Wattage.....	4.5 Watts
Lamps Operated.....	Most 2'- 8' single, bipin T8 & T12 HO or VHO linear, 42W 4-pin and long compact fluorescent Lamps
Emergency Operation.....	(1) 2'- 8' or (2) 2'- 4' 90 minutes
Initial Illumination.....	(1) lamp up to 3000 lumens (2) lamps 1500 lumens each lamp
Operating temp.....	0° to 55°C
Approval.....	UL Listed
Weight.....	9.75 lbs

Outline and Dimensions

Dimensions are approximate and subject to change

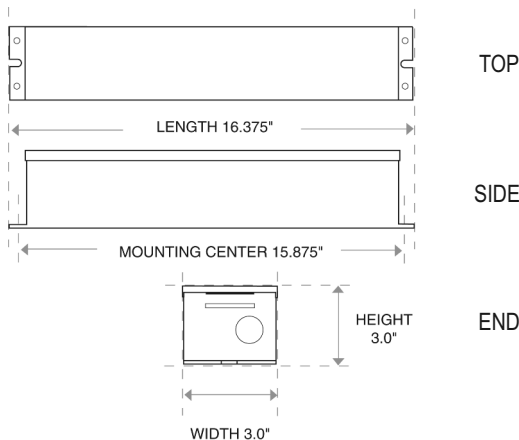

Standard Features

RELIABILITY

The FPS-HL comes complete with a 3-year warranty

UNIT DATA

- **Lumen output** - (1) Lamp - 3000 Lumens
 (2) Lamps - 1500 lumens per Lamp
- **Lamps operated** - Most 2'- 8' single, bipin, T8 & T12, HO
 or VHO Linear, 42W 4-pin and long
 compact fluorescent Lamps
- **Emergency Operation** - 90 minutes (1) 2' - 8' or (2) 2' - 4'

Operational Characteristics

The FPS-HL from EMERGI-LITE is a UL Listed fluorescent emergency ballast that allows the same fixture to be used for both normal and emergency operation. In the event of a power failure, the FPS-HL switches to the emergency mode and operates one or two of the existing lamps for 90 minutes. The unit contains a battery, charger, and inverter circuit in a single can, and is provided with 2 feet of 3/8" flex for wiring to the fixture. The unit is designed for installation next to or on top of the fixture. The FPS-HL can be use with most 2' - 8' lamps, with an initial output of up to 3000 lumens for one or two lamps, and features lamp selector leads for optimizing light output for designated lamp types.

How to order

Standard unit.....FPS-HL