

Prestige™ Thin Die-Cast Series

Die-cast aluminum slim profile exit sign with long-lasting LED performance



Construction

- Die-cast aluminum
- 6 inch EXIT lettering legend, available in red or green
- Choice of finishes: all white or black with brushed aluminum faceplate: Field-selectable chevrons

Mounting

- Surface mount
- Canopy included for end or ceiling mount applications: Universal J-box mounting

Approvals


- UL 924 listed
- Damp location 50°F to 104°F (10°C to 40°F)
- Meets NFPA101 (Life Safety Code), NFPA 70-NEC and OSHA illumination standards
- Compatible with Emergi-Lite Min Inverters (contact your sales representative for more information)

Warranty (subject to proper installation and maintenance)

- Unit has a three-year warranty
- Detailed warranty terms located on page 202 or online at: www.emergi-lite.com/usa/files/EL_Warranty.pdf

Dimensions

Dimensions are approximate and subject to change.

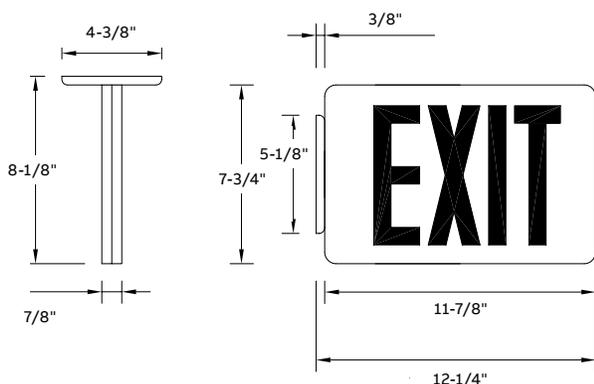

Faceplate



Power consumption

Model	AC specs		DC specs		
AC-only	120/277 VAC, 60Hz	Typical 1W	Less than 1.5W	-	-
Self-powered	120/277VAC, 60Hz	Typical 1W	Less than 1.5W	Ni-Cd battery	Min. 90 minutes

Accessories (order as a separate item)

Description	Suffix
Wire guard (wall mount)	WG1-E
Wire guard (ceiling mount and end mount)	WG5-E

How to order

Frame color/ Face plate	Series	No. of lamps	Legend color
BA = Black body/brushed aluminum face	TX = AC only	1 = Single face	R = Red
WW = White/white	TXN = Self-powered unit (90 min.)	2 = Double face	G = Green

Example: **BATXN1R**

DISTRIBUTOR SELECT