

Preceptor™ Recessed Series

Die-cast LED exit sign



Construction

- Die-cast aluminum faceplate
- Panel features a curved contour for maximum illumination and clarity
- 6 inch EXIT lettering legend available in red or green
- Field-selectable chevrons
- Choice of finishes: white, black or brushed aluminum

Mounting

- Fully recessed mount

Electronics

- Standard Advanced Diagnostics (self-powered models)
- 120/277 60Hz

Special wording panels:

- Available. Contact your sales representative with your design requirements

Approvals

- CSA-US (To UL 924 standards)
- Meets NFPA101 (Life Safety Code), NFPA 70 NEC, OSHA illumination standards
- E-California Energy Commission Title 20

Warranty

- Unit has a five-year limited warranty
- Detailed warranty terms located on page 202 or online at: www.emergi-lite.com/usa/files/EL_Warranty.pdf

Power consumption


Model	AC specs	DC specs
AC-only	120/277VAC, 60Hz 1.4W	- -
Self-powered	120/277VAC, 60 Hz 1.7W Ni-Cd battery	Min. 90 minutes

Housing color



Dimensions

Dimensions are approximate and subject to change.

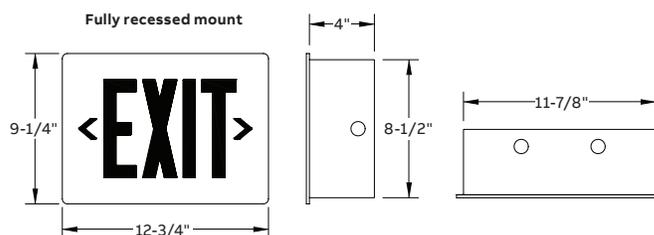

How to order

Recessed	Face color	Series	# of faces
FR= Fully recessed	Blank= Aluminum face B= Black face W= White face	LEDP= AC only LEDPXN= Self-powered Ni-Cd	1= Single face

Legend color	Options	Version
R= Red G= Green RW= Red on white (open face) GW= Green on white (open face)	DL= Damp location FA= Fire alarm activated flasher (self-powered) FZ= Flasher buzzer (self-powered) VR= Vandal-resistant screws VR1= Polycarbonate shield with tamper-proof screws -2CKT= Dual circuit operation (AC models only)	-N= New design

Example: FRBLEDP1R-VR1-N