

ELXN400 LED Series

Low energy and low maintenance for moderate budget application



Housing

- UV stabilized thermoplastic body
- Fully adjustable and reversible Cluster™ LED glare-free heads
- 6 inch EXIT lettering legend, available in red or green
- Universal faces (2 faceplates, 1 backplate)
- Field selectable chevrons

Mounting

- Surface mount
- Canopy included for ceiling mount applications
- Universal J-box mounting finishes

Type of battery

- 3.6V nickel-cadmium battery

Lamp head source

- White LED 3.6V-1.8W each

Electronics

- Optional Advanced Diagnostics
- 120/277 60Hz

Approvals


- UL 924 listed
- Damp location 50°F to 104°F (10°C to 40°F)
- UL 94, 5VA flame rated

Warranty (subject to proper installation and maintenance)

- Unit has a three-year warranty
- Detailed warranty terms located on page 202 or online at:
www.emergi-lite.com/usa/files/EL_Warranty.pdf


Photometric performance

| Spacing center-to-center (feet) | |
|---------------------------------|---------------------|
| 7' mounting height | 15' mounting height |
| 15' | 4' |

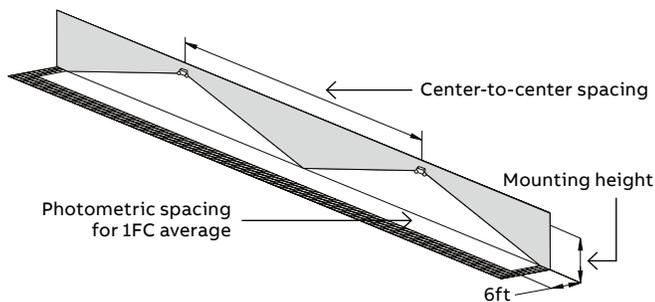

Dimensions

Dimensions are approximate and subject to change.

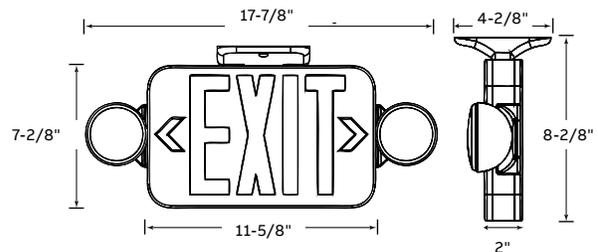

Power consumption

| Model | Current (A) / Power (W) 120/277VAC, 60Hz |
|-------------------|---|
| ELXN400R-2LED | 0.044/0.017A |
| ELXN400G-2LED | 0.032/0.015A |
| ELXN400R-2LEDR | 0.037/4.06A |
| ELXN400G-2LEDR | 0.036/3.8A |
| ELXN400R_2LEDR-AD | 0.038/0.017A |
| ELXN400G_2LEDR-AD | 0.038/0.017A |

How to order

| Series | Legend color | Lamp | Options | Color |
|---------------------------|------------------------------|------------------------|---|--------------------------|
| ELXN400= ELX Combo Series | R= Red exit G= Green exit | -2LED= Round LED array | Blank= No option R= 3.6W remote capacity to power one double head remote ¹ R-AD= 3.6W remote capacity to power one double head dedicated remote with Advanced-Diagnostics ¹ | Blank= White B= Black |

Example: ELXN400R-2LED

¹Remote capacity can only be used to power the EF43D or EF44D remote fixtures or to extend the battery units emergency run time beyond the standard 90 minutes.

Accessories (order as a separate item)

| Description | Suffix |
|-------------|------------|
| Wire guard | WG10-E |
| Battery | 850.0110-E |

EF43D & EF44D Series

Low energy and low maintenance for moderate budget application




The Cluster™ LED EF43D-LED or EF44D-LEDWP

The Cluster™ LED EF43D-LED or EF44D-LEDWP Remote head can ONLY be powered from the ELXN400 LED series combo or EL-2LED battery units of the same family. Used for internal or external applications, the indoor remote head draws 3.6V-3.6W and Weather-Proof head draws 3.6V-3.8W.




Photometric performance

| Spacing center-to-center (feet) | 15' mounting height |
|---------------------------------|---------------------|
| 7' mounting height | 4' |
| 15' | 4' |

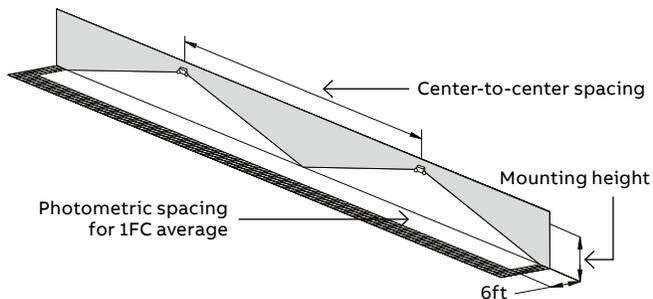

Dimensions

Dimensions are approximate and subject to change.

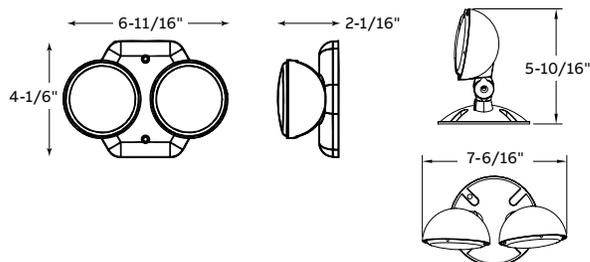

How to order

| Series | # of lamps | Lamp | Option |
|------------------------------------|------------|-----------------------|----------------------------------|
| EF43= Indoor series | D= 2 | -LED= round LED array | Blank= Indoor remote |
| EF44= Outdoor weather-proof series | | | WP= Outdoor weather proof remote |

Example: EF43D-LED