

Survive-All™ EF41 Series

Class I Division 2, Groups A, B, C and D certified remote fixture



Description

- Available with single or double lamp heads
- Die-cast aluminum back plate with gasket
- Vandal-resistant UV stabilized polycarbonate lamp cover
- Comes standard with tamper-proof screws and bit
- Universal J-box mounting
- Extreme operational temperature range: -40°F to +104°F (-40°C to +40°C)

Mounting

- Surface mount
- Conduit entry 1/2" NPT

Approval


- CSA-US (to UL 924 standards)
- Evaluated to the UL 844 Standard for Class I Division 2, Groups A, B, C and D

Warranty

- Five-year limited warranty
- Detailed warranty terms located on page 202 or online at: www.emergi-lite.com/usa/files/EL_Warranty.pdf

Dimensions

Dimensions are approximate and subject to change.

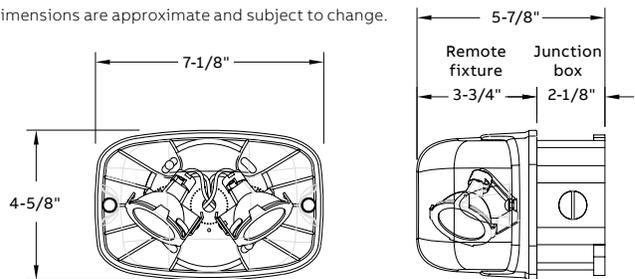


Lamp selection chart and temperature code

Lamp suffix	Voltage	Wattage	Lumens	Replacement #	Temperature code	Max temperature
LA	6	4	200	580.0097-E	T4A	120°C
LB	6	5	415	580.0122-E	T4A	120°C
LG	12	4	220	580.0093-E	T5	100°C
LI	12	5	340	580.0104-E	T4A	120°C
LJ	12	6	540	580.0106-E	T4	135°C
LL	24	4	220	580.0098-E	T5	100°C
LW	120	4	230	580.0113-E	T4A	120°C

Photometric performance

Lamp	Spacing center-to-center (feet)	
	7' mounting height	15' mounting height
LA	39'	34'
LB	74'	57'
LG	49'	39'
LI	68'	54'
LJ	89'	80'
LL	51'	39'

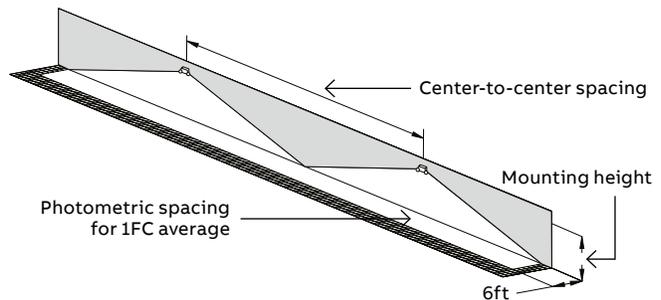

How to order

Series	Lamp type/wattage	Color
EF41= Single	(LA)= 6V-4W, MR16 LED (LJ)= 12V-6W, MR16 LED	-GY= Gray
EF41D= Double	(LB)= 6V-5W, MR16 LED (LL)= 24V-4W, MR16 LED	-BK= Black
	(LG)= 12V-4W, MR16 LED (LW)= 120V-4W, MR16 LED	
	(LI)= 12V-5W, MR16 LED	

Example: EF41(MJ)-GY