



TYPE: \_\_\_\_\_  
 CATALOG #: \_\_\_\_\_  
 NOTES: \_\_\_\_\_

# Chicago Prestige™ Series


Edge-Lit Recessed, Ceiling-Mount Only,  
LED Exit Sign

## Features

- Designed to achieve superior visual clarity and performance with an LED light source. LED sensitive inks are formulated to provide a rich red color on white background
- Clear acrylic panel provides optimum light transmission. Illumination is 100% in both AC and emergency mode
- Housing: Fully-recessed, 20-gauge galvanized steel back-box; equipped with hanger bars for installation between joists or a suspended ceiling
- Rugged cast brushed aluminum trim plate (optional colors available)
- Low energy consumption LED lamps consume less than 2.5W per sign, single or double face, AC-only or Self-Powered
- Sealed Maintenance-Free batteries Nickel-Cadmium (provide minimum 2 hour illumination) in emergency mode
- Fully automatic charger circuitry offers two-wire universal 120 to 277VAC input, solid state transfer, low voltage battery disconnect, and brownout protection
- Self-test and silent diagnostics are optional on all Self-Powered models
- Designed to fit integrally with a 20 gauge steel back box. Each unit includes a bar hanger kit
- Prestige LED Series signs are unaffected by the vibrations, ambient temperature swings and typical power surges detrimental to standard exit light sources
- UL listed to UL 924 Standard
- City of Chicago Approved
- 5 Year Full warranty  
Detailed warranty terms located at: [www.emergi-lite.com/usa/files/EL\\_Warranty.pdf](http://www.emergi-lite.com/usa/files/EL_Warranty.pdf)

## Dimensions

Dimensions are approximate and subject to change.

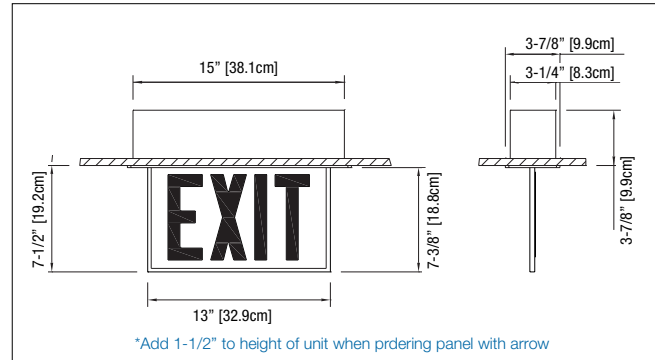

## Power Consumption Chart

Model	AC Specs		DC Specs	
	AC-only	120 to 277VAC	Less than 1.4W	
AC/DC-remote	120 to 277VAC	Less than 1.4W	6 to 24VDC	Less than 1.4W
Self-Powered	120 to 277VAC	Less than 2.3W	Ni-Cd battery	Min. 90 minutes
Self-Powered diagnostic	120 to 277VAC	Less than 2.3W	Ni-Cd battery	Min. 90 minutes

## Accessories (order as a separate item)


DESCRIPTION	
Special wording	Contact your sales representative
DESCRIPTION	
Two 27-inch adjustable bar hangers*	TBH

\* Bar hangers supplied with unit, order as replacement only

## Backbox (order as a separate item)

DESCRIPTION	SUFFIX
Backbox kit flat trim Chicago	BBKTRCC-E

## Arrow (Chevron) Designation



\*Wording and chevrons not to scale. For illustration purposes only.

## How to Order

HOUSING COLOR	CUSTOM SPECIFICATION	MODEL	LEGEND AND PANEL	TRIM PLATE	OPTIONS
<b>Blank</b> = Brushed aluminum <b>W</b> = White <b>B</b> = Black <b>BR</b> = Dark bronze (painted) <b>PB</b> = Polished brass <b>CH</b> = Polished Chrome	<b>CC</b> = City of Chicago	<b>PLX</b> = AC only <b>PLXDC</b> = AC/DC-Remote 6-24V <b>PLX2CKT</b> = AC-Dual circuit <b>PLXN</b> = Self-Powered <b>PLXND</b> = Self-Powered Diagnostic	<b>#2A</b> = Single Face, STAIRS, No Arrow <b>#17A</b> = Double Face, STAIRS, No Arrow <b>#5A</b> = Single Face, STAIRS →, Arrow right <b>#8A</b> = Single Face, STAIRS ←, Arrow left <b>#11A</b> = Single Face, STAIRS ↔, Double Arrow <b>#23A</b> = Double Face, STAIRS ↔, Double Arrow <b>#20A</b> = Double Face, (1) STAIRS, (2) STAIRS, Single Arrow <b>#3</b> = Single Face, EXIT, No Arrow <b>#18</b> = Double Face, EXIT, No Arrow <b>#6</b> = Single Face, EXIT →, Arrow right <b>#9</b> = Single Face, EXIT ←, Arrow left <b>#12</b> = Single Face, EXIT ↔, Double Arrow <b>#24</b> = Double Face, EXIT ↔, Double Arrow <b>#21</b> = Double Face, (1) EXIT, (2) EXIT, Single Arrow <b>LP</b> = Panel shipped separately	<b>F</b> = Flat (fully recessed)	<b>-DL</b> = Damp Locations <b>-X</b> = Less backbox

Example: **BCCLPX#2AF**