



TYPE:	_____
CATALOG #:	_____
NOTES:	_____

CCRS Series

6 and 12 Volt Decorator Recessed Emergency Lighting

Features


- Each unit comes with two (2) 6 or 12V-12W sealed beam halogen EF28 lamp heads (standard). EF-150 lamp heads are optional
- Constructed of 20-gauge steel with an off-white baked enamel finish
- Available with sealed, maintenance-free Nickel-Cadmium, or Lead-Calcium batteries
- PulsePlus Charger circuitry offers 120/277V input 60 Hz., 0.3/0.15A (other inputs available), fused output circuit(s), dual diagnostic indicator lights, temperature compensated charger, sealed relay, low voltage battery disconnect, brownout protection and lock out (automatic battery connect)
- Fully-recessed assembly for ceiling or wall mount. Includes adjustable bar hangers for grid ceilings. Can be framed into studs/joists
- UL924 Listed
- Meets City of Chicago requirement
- 3-year limited warranty
Detailed warranty terms located at: www.emergi-lite.com/usa/files/EL_Warranty.pdf

Optional Features

ACCESSORIES	
Wire Guard (Units with EF-9, EF-10 or EF-18, EF-150 Heads)	WG6-E
Remote Test Switch (metal face plate)	RTS
Remote Test Switch (plastic face plate)	RTS-1

Dimensions

Dimensions are approximate and subject to change.

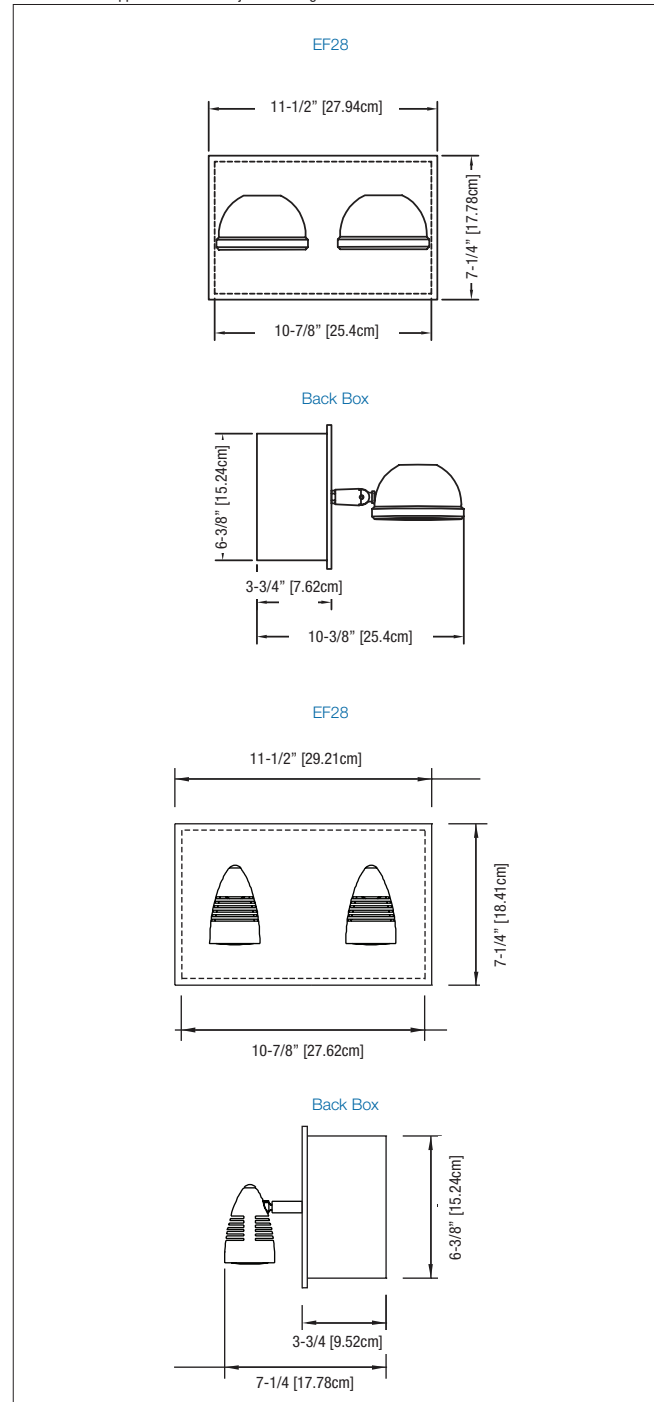

TYPE: _____
 CATALOG #: _____
 NOTES: _____



Designed for fully recessed installation
 in walls or ceilings

Unit Rating

UNIT EQUIPMENT - WITH REMOTE CAPABILITY							
Sealed Maintenance-Free Battery Types	D.C. Voltage	Model Number		Watts to 87-1/2% of rated battery voltage*			
		EF-150 Deco	EF-28 Lamp Heads	1 ^{1/2} hrs	2 hrs	3 hrs	4 hrs
Nickel-Cadmium	6	CCRSC25-2150	CCRSC25-2	25	18	12	9
	12	CC12RSC36-2150	CC12RSC36-2	36	21	15	12
Lead-Calcium	6	CCRSM27-2150	CCRSM27-2	27	18	14	10
	6	CCRSM36-2150	CCRSM36-2	36	25	20	14
	12	CC12RSM36-2150	CC12RSM36-2	36	25	20	14

* National Electrical Code Specification

How to Order

SERIES	SERIES/BATTERY TYPE	HEADS	HEAD STYLE	LAMP TYPE	OPTIONS
CC = City of Chicago Approved	RSC25 = 6V-25W Ni-Cd RSM27 = 6V-27W Lead-Calcium RSM36 = 6V-36W Lead-Calcium 12RSC36 = 12V-36W Ni-Cd 12RSM36 = 12V-36W Lead-Calcium	-0 = No head -1 = One head -2 = Two heads	Blank = EF28 heads 150 = EF150 Deco heads MR16	Blank = 6V-12W or 12V-12W sealed beam halogen HG = 12V-12W Halogen bi-pin MK = 12V-12W MR16 Halogen LA = 6V-4W, MR16 LED LG = 12V-4W, MR16 LED LI = 12V-5W, MR16 LED LJ = 12V-6W, MR16 LED	Blank = No options -AD = Advanced Diagnostics (audible)

Example: **CCRSM36-2**