

Prestige™ Floor Proximity Series

Master with remote floor proximity LED exit



Prestige™ DX, DXN “Master” & LL “Floor Proximity” Tandem Exit Signs (must be ordered together)

Construction

- **DX, DXN** “Master” exit faceplate, backplate and canopy are made of die-cast aluminum
- **DX, DXN** offers 6 inch EXIT lettering legend, available in Red or Green
- **LL** “Floor Proximity” exit faceplate is made of die-cast aluminum; backbox is made of steel
- **LL** offers 6 inch EXIT lettering legend, available in red or green
- Choice of finishes: white, black or brushed aluminum
- Red or green long-life light emitting diodes (LED) illumination

Mounting

- **DX, DXN** surface mount
- Canopy included for ceiling mount applications
- Backplate features universal knockouts for a standard 4 inch junction box, used in wall mount applications
- **LL** surface mount or recessed mount
- Single face model only

Power consumption

Color	Model	AC specs	DC specs
Red	AC-only	120/277VAC, 60Hz	1.3W
	AC-2 circuit	120/277 & 277/277VAC, 60Hz	2.6W
	Self-powered	120/277VAC, 60Hz	3.8W
Green	AC-only	120/277VAC, 60Hz	1W
	AC-2 circuit	120/277 & 277/277 VAC, 60Hz	3.3W
	Self-powered	120/277VAC, 60Hz	5W

Housing colors



Brushed aluminum



White



Black

Chevrons

- **DX, DXN** faceplate includes two field-selectable, knock-out chevron indicators
- **LL** faceplate does not include chevron indicators

Self-Diagnostics

- **DXN** self-powered model standard with Advanced Diagnostics

Special wording panel

- Not available

Electronics

- Standard Advanced Diagnostics on **DXN**
- Optional Nexus® monitoring system
- 120-277 60Hz
- AC Models compatible with Emergi-Lite Mini Inverters to a maximum of 20% of the mini inverter's capacity

Approvals

- CSA-US (to UL 924 standards)
- Meets NFPA101 (Life Safety Code), NFPA 70 NEC, OSHA illumination standards


Warranty

- Unit has a five-year limited warranty
- Detailed warranty terms located on page 202 or online at: www.emergi-lite.com/usa/files/EL_Warranty.pdf


Dimensions

Dimensions are approximate and subject to change.


Self-powered/AC-only master
DXN1G-M-N
DX1G-M-N



Floor proximity slave surface mount
LLGS
LLRS

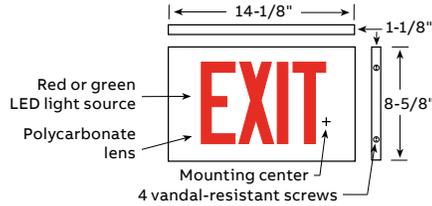


Floor proximity slave recessed mount
LLGR
LLRR

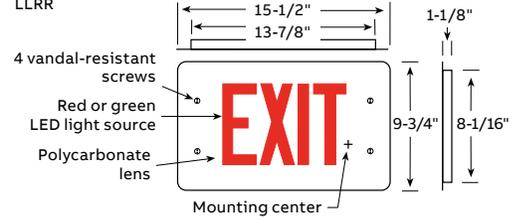


How to order for a typical application:

Self-powered master with floor proximity unit

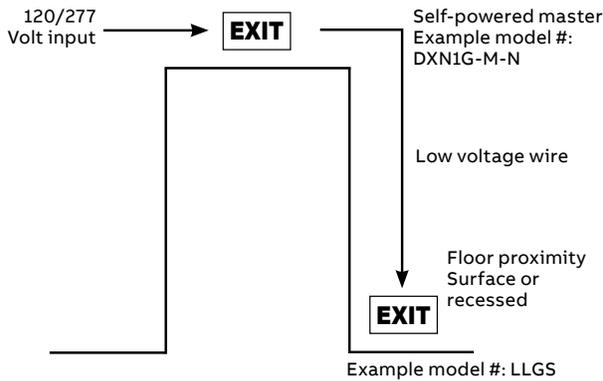

AC-only master with floor proximity unit 2 circuit application

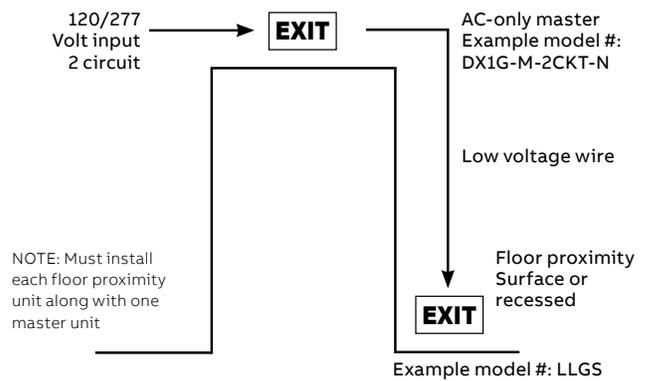

NOTE: Must install each floor proximity unit along with one master unit

Features (optional)

Description	Suffix
Vandal-resistant shield and screws	VR1

Accessories (order as a separate item)

Description	Suffix
Wire guard (for floor proximity recessed)	WG11-E

How to order – self-powered master (unit for above door)

Color option prefix	Series	Faces	Stencil face lamp color	Master unit	Standard series designator
Blank= Brushed alum. face, black body WW= All white BB= All black	DXN	1= Single face 2= Double face	R= Red G= Green RW= Red/white GW= Green/white	-M	-N

Example: DXN1G-M-N

How to order – AC-only master (unit for above door)

Color option prefix	Series	Faces	Stencil face	Master unit	Option	Standard series designator
Blank= Brushed alum. face, black body WW= All white BB= All black	DX	1= Single face 2= Double face	R= Red G= Green RW= Red/white GW= Green/white	-M	Blank= AC only	-N

Example: DX1G-M-N

How to order – floor proximity unit (unit on side of door)

Color option prefix	Series	Stencil face lamp color ¹	Mounting	Option
Blank= Brushed alum. face, black body W= All white B= All black	LL	R= Red G= Green RW= Red/white GW= Green/white	R= Recessed S= Surface	-VR1= Vandal-resistant screws/ polycarbonate shield

Example: LLGS-VR1

¹Open face required for special wording (please contact your sales representative)