

TYPE: \_\_\_\_\_  
 CATALOG #: \_\_\_\_\_  
 NOTES: \_\_\_\_\_



# Prestige™ Economizer Series

Slim Profile Surface Mount LED Edge-Lit Exit Sign

## Features

- Acrylic panel with curved contour provides superior clarity and illumination. Long-life LED light for low maintenance costs and superior illumination
- Legend with a choice of red or green six-inch letters, and easy-to-add field-installed stick-on translucent directional arrows. Choice of legend background: clear, white or mirror
- Slim-profile extruded aluminum housing with slim-profile Die-Cast aluminum canopy. Choice of finishes: textured aluminum or off-white
- Energy efficient power consumption: less than 3W for Self-Powered version and less than 2 watts for AC only single or double face
- Available with sealed Nickel-Cadmium batteries that provide 90 minutes of emergency lighting
- Simple, two-wire universal AC input (120V to 277VAC 60Hz) prevents installation errors. Simple, two-wire universal DC input: 6V to 24VDC
- Universal surface mounting: wall, ceiling or end mount. Click-to-open housing door allows easy access to the panel and electrical wiring. For recessed mount please consult your sales representative
- UL924 Listed
- 3-year limited warranty  
Detailed warranty terms located at: [www.emergi-lite.com/usa/files/EL\\_Warranty.pdf](http://www.emergi-lite.com/usa/files/EL_Warranty.pdf)

## Warranty

3 years full warranty \*subject to proper installation and maintenance.

## Accessories (order as a separate item)

DESCRIPTION	SUFFIX
White Pendant	PE-P-WH*
Black Pendant	PE-P-BK*

## Power Consumption

Model	AC Specs		DC Specs	
AC-only	120 to 277VAC	Less than 2W	–	–
AC/DC	120 to 277VAC	Less than 2W	6 to 24VDC	Less than 1.5W
Self-Powered	120 to 277VAC	Less than 3W	Ni-Cd battery	Min. 90 minutes


## Suggested Specification

Supply and install the **Emergi-Lite® Prestige™ Economizer™** Series slim-profile edge-lit exit sign. The unit shall operate with universal two-wire AC input voltage from 120Vac to 277Vac at less than 3 Watts for single and double face legends. The housing assembly shall be fabricated of extruded aluminum with a textured finish and \_\_\_\_\_ color. The canopy shall be of die-cast aluminum and allow for ceiling, wall, or end mount installation. The light source shall be long-life LEDs installed on a PCB strip. The acrylic panel shall have a curved contour. The legend shall have six-inch high with 3/4-inch stroke red letters on a clear background, unless otherwise specified. The unit shall be equipped with field installed stick-on translucent directional indicators, to be installed in the field as required by the code. The exit sign in a self-powered configuration shall be equipped with sealed Nickel-Cadmium batteries and perform minimum 90 minutes of emergency illumination upon AC failure. The equipment shall be UL-924 listed.

The equipment shall be UL-924 listed. The unit shall be **Emergi-Lite®** model: \_\_\_\_\_.

## Dimensions

Dimensions are approximate and subject to change.

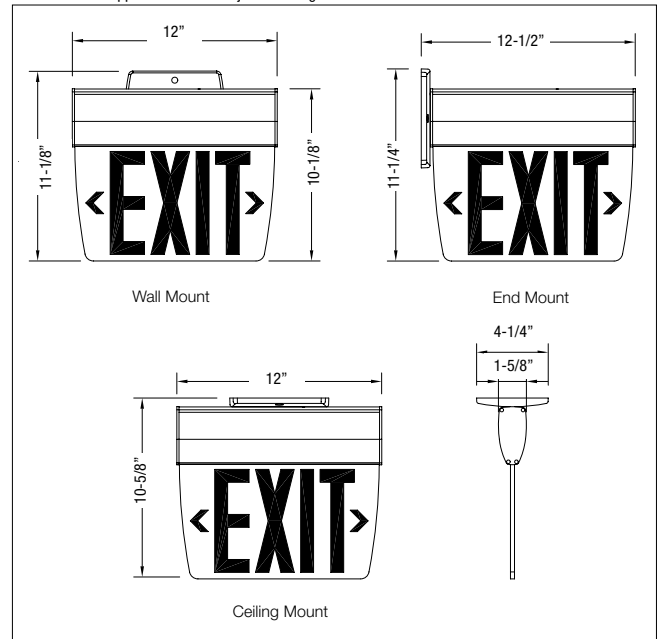

## How to Order (Surface Mount Series)

HOUSING COLOR	SERIES	FACE	LEGEND COLOR
<b>TA</b> = Textured aluminum <b>OW</b> = Off white	<b>PE</b> = AC <b>PES</b> = AC/DC <b>PEN</b> = Self-Powered	<b>1</b> = Single face <b>2</b> = Double face	<b>RC</b> = Red on clear* <b>RW</b> = Red on white <b>RM</b> = Red on mirror <b>GC</b> = Green on clear* <b>GM</b> = Green on mirror  * Single face only

Example: **TAPE1RC**