



6 Volt Provider™ PRO-2/PRO-3 Series

The **Provider™ Series** is the proven look in emergency lighting design. Its sleek low profile thermoplastic body combined with a transparent polycarbonate lamp shield to make a contemporary style that's just right for today's aesthetic demands. With a standard white finish, the Provider will compliment a variety of interiors including offices, theaters, restaurants and shopping malls. Provider is versatile too, its body, measuring only 11" X 5" can be mounted in any orientation on wall or ceiling.

UL Listed

Complies with NEC, Life Safety Code and OSHA.

UL Listed for use in Damp Locations

Sealed Maintenance-Free Batteries

- Lead-Calcium

Standard Features

Reliability

The Provider Series comes complete with a 3-year full warranty, (excluding lamps, pilot lights and fuses).

Unit Data

The Provider, constructed of thermoplastic, is completely self-contained. A polycarbonate shield protects the fully adjustable self-locking heads. The 6 volt high intensity tungsten (HIT) lamps and mirrored reflectors supply generous amounts of emergency lighting.

Reliable Integrated Circuitry:


Integrated circuitry offers 120/277 Vac 60 Hz standard operation, LED pilot light, rocker type test switch, temperature compensated, low voltage battery disconnect, brownout protection and lockout (automatic battery connect).

Advanced Diagnostics (optional)

Enjoy the peace of mind provided by Emergi-Lite's advanced diagnostic circuitry. The AD circuit monitors every critical function of the unit and provides an audible and visual indicator when a fault is detected (non-audible versions available).

Outline and Dimensions

Dimensions are approximate and subject to change.

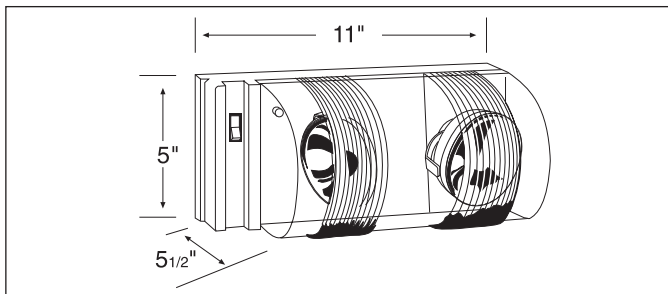


Unit Rating Chart

Each unit furnished with one HIT lamp per head.

PROVIDER BATTERY UNIT						
Sealed Maintenance-Free Battery Types	D.C. Voltage	Model Number	*Watts to 87 % of rated battery voltage			
			1 1/2 hrs	2 hrs	3 hrs	4 hrs
Lead-Calcium	6	PRO-2	12	9.5	-	-
	6	PRO-3	18	12	10	7



Fast and Easy Installation

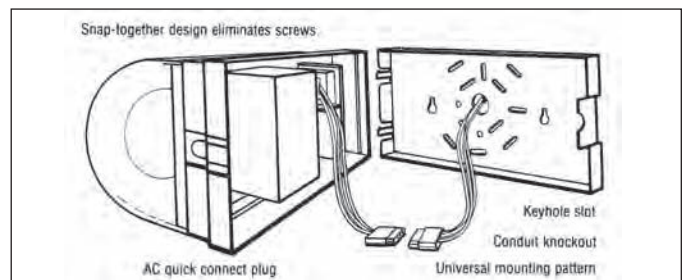

Provider's AC quick-connect plug, battery lockout feature and snap-together design make installation fast and easy.

With the AC quick-connect plug, contractors simply make the AC connection to the plug, mount the backplate and plug in the unit.

The battery lockout feature is an AC activated load switch that prevents the batteries from discharging until the unit is energized with AC power. This allows the contractor to install the Provider and connect the batteries in one convenient operation.

A universal mounting pattern keyhole slots and a conduit knock-out provide alternate mounting methods.

Optional Features

Description	Add Suffix
Black Housing	-B
Voltmeter	-VM**
Vandal Resistant Screws	-VR
Advanced Diagnostics	-AD
Advanced Diagnostics, Non-Audible	-ADNA
Damp Location	-DL
Unit with cord set	-C*

* Standard cord is 3 ft. custom lengths available.

** Not available with AD/ADNA option.

Accessories (order as a separate item)

Replacement lamps 570.0012-E

Provider remote lighting fixtures

(Requires an external DC source) (Page 83)

6 volt 10.8 total unit wattage	6PRO-10
12 volt 18 total unit wattage	12PRO-2(ZN)
24 volt 18 total unit wattage	24PRO-2(ZN)

How To Order

	Model #
Standard	PRO-2
with remote capacity / 11 watts	PRO-3