Total™ Edge Series

Single and double face, surface and recessed mount edge-lit exit sign



Construction

- Extruded aluminum housing
- High grade acrylic panel
- 6 inch EXIT lettering legend, available in red or green
- Field-selectable chevrons
- Satin aluminum housing
- Optional Advanced Diagnostics

Mounting

Universal mount model

- Pivoting panel design allows for recessed, surface, wall or ceiling mount installation
- A ratcheting mechanism allows the panel to be set in place from 0° to 180° for wall or sloped ceiling mounting
- Canopy included for surface wall, end or ceiling mount application
- Easy snap in backbox with securing trim plate allow for sheet rock ceiling installation
- Trim plate, 27 inch adjustable T-bar hangers and a junction box included for recessed application

Approvals

- UL 924 listed
- Damp location 50°F to 104°F (10°C to 40°F)
- Meets NFPA101 (Life Safety Code)
- NFPA 70 NEC and OSHA illumination standards
- Compatible with Emergi-Lite Min Inverters (contact your sales representative for more information)

Warranty (subject to proper installation and maintenance)

• Unit has a three-year warranty Detailed warranty terms located on page 202 of the catalog or online at:


www.emergi-lite.com/usa/files/EL_Warranty.pdf


Accessories (order as a separate item)

Description	Suffix	
Battery	850.0107-E	
Pendant white	P*WT	
Pendant black	P*BK	
Pendant adapter ¹	081886-E	

¹Required for use with pendant

Dimensions Dimensions are approximate and subject to change.

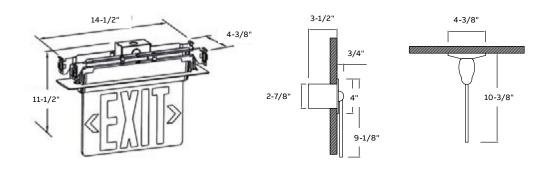

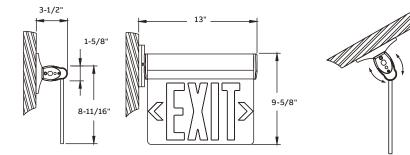

Power consumption

Model			AC specs		DC specs
	AC only	120VAC, 60Hz	2.0-2.6W	-	-
		277VAC, 60Hz	2.6-3.1W	_	_
Red	Self-powered	120VAC, 60Hz	2.0-2.6W	Ni-Cd battery	Min. 90 minutes
		277VAC, 60Hz	2.6-3.1W	Ni-Cd battery	Min. 90 minutes
Green	AC only 120VAC, 60Hz 277VAC, 60Hz	120VAC, 60Hz	2.8-3.3W	-	_
		3.5-4W	-	-	
	Self-powered	120VAC, 60Hz	2.8-3.3W	Ni-Cd battery	Min. 90 minutes
		277VAC, 60Hz	3.5-4W	Ni-Cd battery	Min. 90 minutes

How to order

Series	Color	Legend	Options
PA= AC Only	R= Red on	6= 6" EXIT single and double face with	-AD= Advanced
PN= Self-powered PA2= AC only dual circuit	mirror G = Green on	universal chevrons	Diagnostics ¹
Example: PNR6-AD	mirror		

¹Only available on self-powered models