

## Preceptor™ Remote Capacity Series

Die-cast aluminum remote capacity exit sign



### Construction

- Die-cast aluminum housing
- Panel features a curved contour for maximum illumination and clarity
- 6 inch EXIT lettering legend available in red or green
- Field-selectable chevrons
- Choice of finishes: white, black or brushed aluminum

### Mounting

- Surface mount
- Canopy included for end or ceiling mount applications
- Universal J-box mounting

### Electronics

- Optional **Advanced Diagnostics**
- 120/277 60Hz

### Battery type

- RCL model, (lead-calcium battery) 6V-9W remote load capacity

### Special wording panels

- Available. Contact your sales representative with your design requirements

### Approvals

- UL 924 listed
- Damp location optional (50°F to 104°F)
- Meets NFPA101 (Life Safety Code), NFPA 70 NEC, OSHA illumination standards

### Warranty

- Unit has a five year limited warranty
- Detailed warranty terms located on page 202 or online at: [www.emergi-lite.com/usa/files/EL\\_Warranty.pdf](http://www.emergi-lite.com/usa/files/EL_Warranty.pdf)


### Power consumption

Series	AC input	AC specs		Voltage	Battery	Battery capacity in watts			
		Maximum				1-1/2 hrs	2 hrs	3 hrs	4 hrs
RCL	120/277VAC, 60Hz	0.13/0.06A	15W	6V	Lead-calcium	9	-	-	-

### Housing color



Black




White



Brushed aluminum

**Dimensions**

Dimensions are approximate and subject to change.

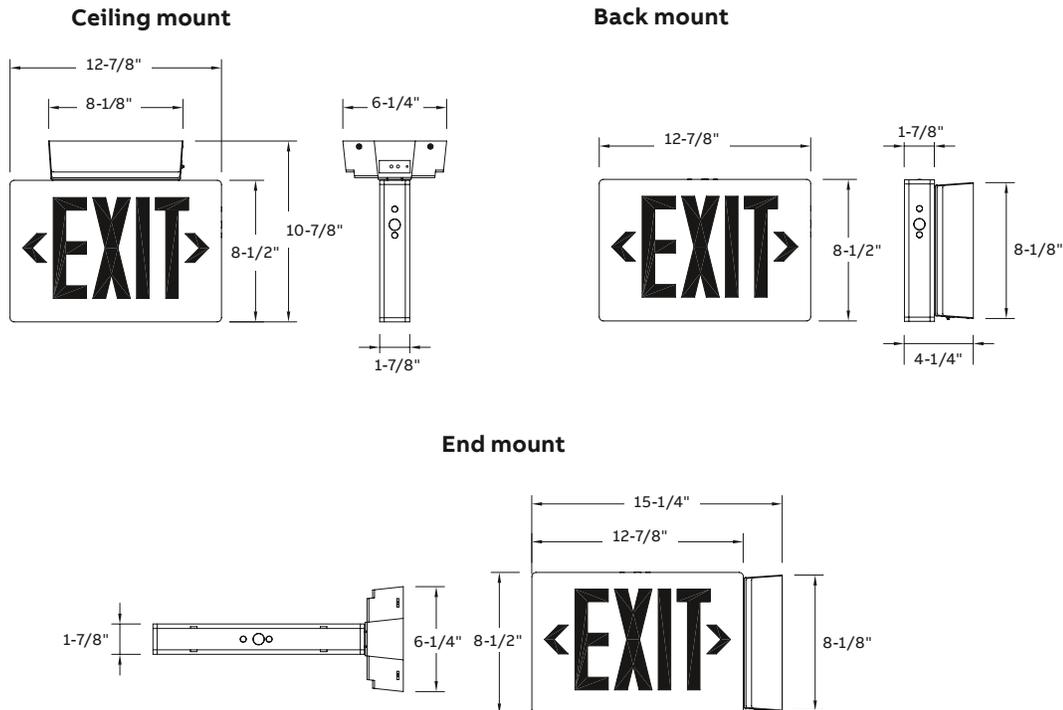

**Accessories** (order as a separate item)

Description	Suffix
Wire guard, back mount	WG13-E
Wire guard, ceiling mount	WG14-E

**How to order**

Housing color	Series	Battery type	# of faces	Legend color	Options
<b>BA</b> = Black body/ aluminum face	<b>P</b> = Preceptor	<b>RCL</b> = Sealed lead-calcium, 9W remote capacity	<b>1</b> = Single face <b>2</b> = Double face	<b>R</b> = Red <b>G</b> = Green <b>RW</b> = Red on white (Open face required for special wording) <b>GW</b> = Green on white (Open face required for special wording)	<b>AD</b> = Advanced Diagnostics (audible) <b>ADNA</b> = Advanced Diagnostics (non-audible)
<b>BB</b> = Black body/ black face					
<b>WW</b> = White body/ white face					
<b>WA</b> = White body/ aluminum face					
<b>AA</b> = Brushed aluminum body and face					

Example: BAPRCL2R