

Revelation™ DC Series

Virtually invisible, architecturally pleasing



Description

- Indoor use
- One-piece all-metal module design
- Complete 360° door rotation
- Slip gear mechanism protects the unit from objects that would cause the door rotation to be forcibly stopped.

Finish


- Flat door and frame are covered with a high-quality, powder coated textured off-white finish
- Surface finish can be customized on site with paint, wallpaper or other coverings.

Mounting

- The module includes the electrical junction box and is installed on the wall stud or ceiling beam with the help of a simple, U-shape bracket.
- Key-hole slot for ease of installation

Photometric performance

Lamp	Spacing center-to-center (feet)	
	7 ft. mounting height	15 ft. mounting height
LG	55'	43'
LI	71'	56'
LJ	100'	85'
LL	56'	44'

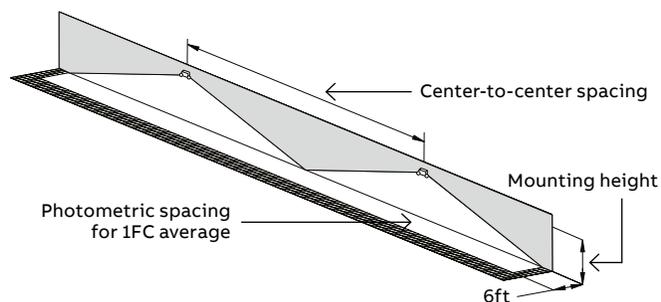

Lamp type

- Choice of MR16 LED lamp wattages

Approval


- CSA-US (to UL 924 standards)

Warranty

- Unit has a five-year limited warranty
Detailed warranty terms located on page 202 or online at:
www.emergi-lite.com/usa/files/EL_Warranty.pdf

Dimensions

Dimensions are approximate and subject to change.

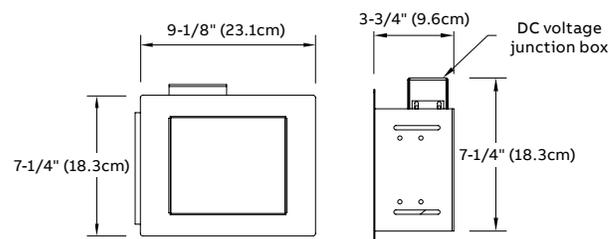

How to order

Input voltage	Series	# of lamps	Lamp type/ wattage	Options
12= 12VDC	RTR=	2= Two	-LG= 12V-4W,	Blank= No
24= 24VDC	Revelation	lamps	MR16 LED	options
	remote	standard	-LI= 12V-5W,	-DL= Damp
			MR16 LED	location
			-LJ= 12V-6W,	
			MR16 LED	
			-LL= 24V-4W,	
			MR16 LED	

Example: 12RTR2-LG-DL