

EL-2LED Series

Low energy, low maintenance emergency lighting for moderate budget applications



ESCORT II



Construction

- UV stabilized thermoplastic body
- Fully adjustable Cluster™ LED glare-free heads
- Choice of white or black housing

Mounting

- Ceiling or wall mount
- Universal J-box mounting

Lamp type

- White LED 3.6V-1.8W each, 70 lumens per head

Electronics

- Pulse plus charger
- Low voltage disconnect
- Automatic brownout protection
- Battery lock-out installation
- Fused output circuit
- Optional Advanced Diagnostics
- 120/277 60Hz

Sealed maintenance-free battery

- 3.6V nickel-cadmium battery

Approvals


- UL 924 listed
- Damp location 50°F to 104°F (10°C to 40°F)
- UL 94, 5VA flame rated (68°F to 86°F, 20°C to 30°C)
- EL-2LED is circle BC to meet CEC. Title 20

Warranty (subject to proper installation and maintenance)

- Unit has a three-year warranty
- Detailed warranty terms located on page 202 or online at:
www.emergi-lite.com/usa/files/EL_Warranty.pdf


Photometric performance

Spacing center-to-center (feet)	
7' mounting height	15' mounting height
15'	4'

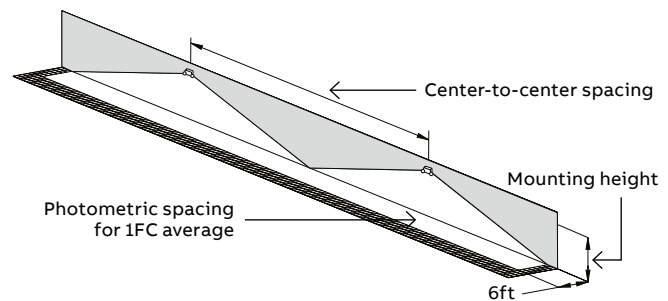

Dimensions

Dimensions are approximate and subject to change.

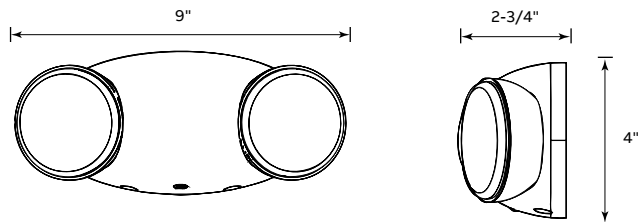

Power consumption

	Current (A) / Power (W)
Model	120/277VAC, 60Hz
EL-2LED	0.103/0.10A
EL-2LEDR	0.13/0.16A
EL-2LEDR-AD	0.058/0.029A

How to order

Color	Series	Lamp option	Options
Blank= White B= Black	EL	-2LED= round LED array	Blank= No option R= 3.6W remote capacity to power one double head remote ¹ R-AD= 3.6W remote capacity to power one double head dedicated remote with Advanced-Diagnostics ¹

Example: EL-2LEDR

¹Remote capacity can only be used to power the EF43D or EF44D remote fixtures or to extend the battery units emergency run time beyond the standard 90 minutes.