

ELXN400 LED Series

Low energy and low maintenance for moderate budget application



Housing

- UV stabilized thermoplastic body
- Fully adjustable Cluster™ LED glare-free heads
- 6 inch EXIT lettering legend, available in red or green
- Field selectable chevrons

Mounting

- Surface mount
- Canopy included for ceiling mount applications
- Universal J-box mounting finishes

Type of battery

- 3.6V nickel-cadmium battery

Lamp head source

- White LED 3.6V-1.8W each

Electronics

- Optional Advanced Diagnostics
- 120/277 60Hz

Approvals


- UL 924 listed
- Damp location 50°F to 104°F (10°C to 40°F)
- UL 94, 5VA flame rated

Warranty (subject to proper installation and maintenance)

- Unit has a three-year warranty
- Detailed warranty terms located on page 178 or online at:
www.emergi-lite.com/usa/files/EL_Warranty.pdf


Photometric performance

Spacing center-to-center (feet)	
7' mounting height	15' mounting height
15'	4'

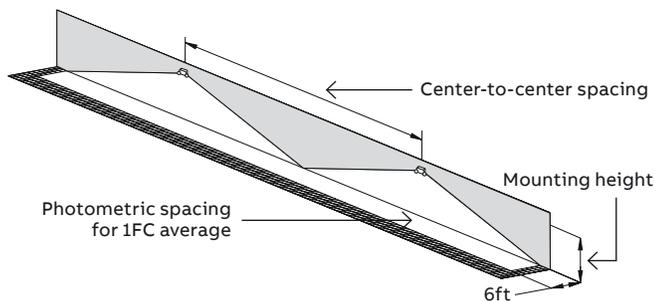

Dimensions

Dimensions are approximate and subject to change.

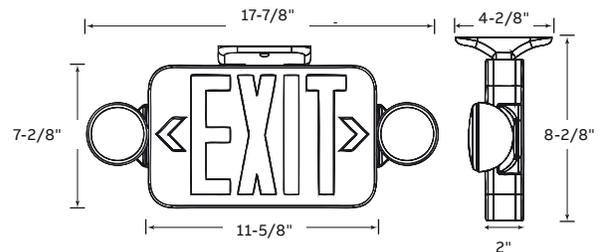

Accessories (order as a separate item)

Description	Suffix
Wire guard	WG10-E
Battery	850.0107-E

Power consumption

Model	Current (A) / Power (W) 120/277VAC, 60Hz
ELXN400R-2LED	0.044/0.017A
ELXN400G-2LED	0.032/0.015A
ELXN400R-2LEDR	0.037/4.06A
ELXN400G-2LEDR	0.036/3.8A
ELXN400R_2LEDR-AD	0.038/0.017A
ELXN400G_2LEDR-AD	0.038/0.017A

How to order

Series	Legend color	Lamp	Options	Color
ELXN400= ELX Combo Series	R= Red exit G= Green exit	-2LED= Round LED array	Blank= No option R= 3.6W remote capacity to power one double head remote ¹ R-AD= 3.6W remote capacity to power one double head dedicated remote with Advanced-Diagnostics ¹	Blank= White B= Black

Example: ELXN400R-2LED

¹Remote capacity can only be used to power the EF43D or EF44D remote fixtures or to extend the battery units emergency run time beyond the standard 90 minutes.


EF43D & EF44D Series

Low energy and low maintenance for moderate budget application



Photometric performance

Spacing center-to-center (feet)	
7' mounting height	15' mounting height
15'	4'

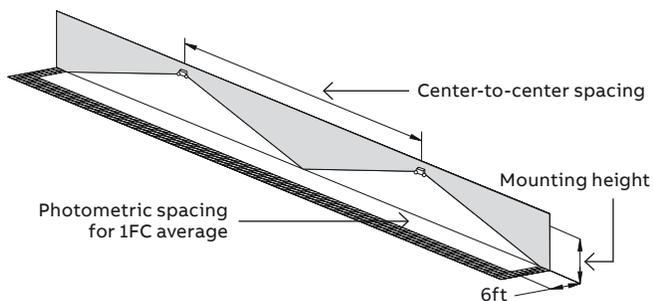


The Cluster™ LED EF43D-LED or EF44D-LEDWP

The Cluster™ LED EF43D-LED or EF44D-LEDWP Remote head can ONLY be powered from the ELXN400 LED series combo or EL-2LED battery units of the same family. Used for internal or external applications, the indoor remote head draws 3.6V-3.6W and Weather-Proof head draws 3.6V-3.8W.



Dimensions

Dimensions are approximate and subject to change.

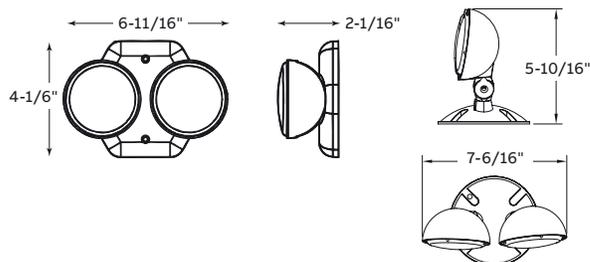

How to order

Series	# of lamps	Lamp	Option
EF43= Indoor series	D= 2	-LED= round LED array	Blank= Indoor remote
EF44= Outdoor weather-proof series			WP= Outdoor weather proof remote

Example: EF43D-LED