

## HPRL Series High-Performance Industrial Remote

NEMA-4X, high-performance industrial remote unit




### Photometry performance

Capable of being installed indoors or outdoors, the **HP Series** of LED emergency lights deliver a stable and consistent illumination on the path of egress for a wide range of mounting heights. Depending on the required illumination levels need for the application, one choose between three level of lumen output using a 6W, 10W or 15W head. See cross reference to traditional MR16 halogen emergency lamp types.

—  
Spacing center-to-center (feet)

Mounting height	Lamp L6/6W, 565Lm	Lamp L10/10W, 1000Lm	Lamp L15/15W, 1300Lm
10 ft	80	110	140
15 ft	70	105	135
20 ft	60	100	130
25 ft	50	95	120

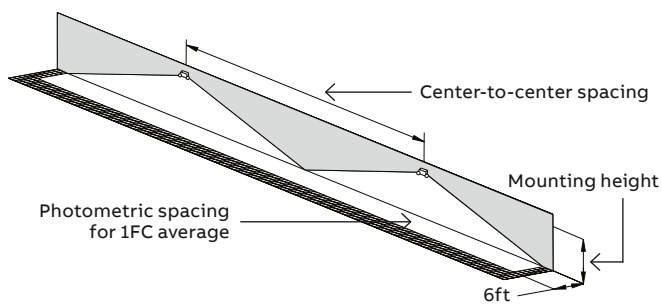

Industrial environment: wall mounted equipment, reflectances: 10/10/10; 6-ft wide illumination path. Illumination as per NFPA101; Average: 1fc; Min: 0.1fc; Max/ min < 40:1

LED head	Power	Total lumens	Out-perform spacing of MR16 halogen lamp types
L6	6W	565	37W PAR36, MR16 halogen (700 lumens)
L10	10W	1000	50W PAR36, MR16 halogen (950 lumens)
L15	15W	1300	50W MR16-IR halogen (1550 lumens)

### Housing

- Lightweight polycarbonate gray housing with captive screws
- NEMA-4X protection grade
- All external fasteners and hardware are constructed of stainless steel

### Mounting

- Simple and easy to install on walls, poles, columns, struts also on vertical
- Pole or column installation bracket sold separately (order catalog number: PMK1-E) 1/2 NPT conduit entry on top or side

### Performance

- 6W, 10W and 15W high efficacy LED emergency heads outperform traditional 50W MR16 halogen
- 15W head outperforms traditional 50W MR16 halogen
- Innovative head design: four-LED and dual- driver provide illumination even in case of unexpected component failure

### Approvals



- UL 924 listed
- Can be installed in wide temperature range: -40°F to 131°F (-40°C to 55°C)

### Warranty (subject to proper installation and maintenance)

- Unit has a five-year warranty
- Detailed warranty terms located on page 202 or online at: [www.emergi-lite.com/usa/files/EL\\_Warranty.pdf](http://www.emergi-lite.com/usa/files/EL_Warranty.pdf)

### Dimensions

Dimensions are approximate and subject to change.

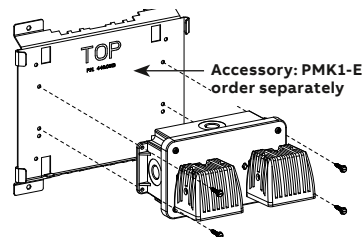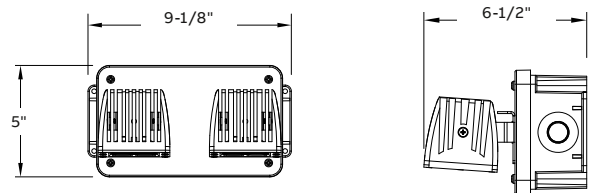

### How to order

Series	# of heads	LED head
HPRL= High-performance remote	Blank= Single head D= Double head	L6= 12-24V – 6W (565 lumens) L10= 12-24V – 10W (1000 lumens) L15= 12-24V – 15W(1300 lumens)
<b>Example: HPRLD6</b>		