

## NYC Approved AGC8 Series

NYC extruded aluminum edge-lit combo



### Construction

- Extruded aluminum trim plate
- 8 inch EXIT lettering legend, available in red
- Acrylic panel
- Single face red on clear, double face red on mirror
- Lamp heads are fully adjustable
- 2.5W, 400 lumens per head

### Mounting

- Wall and ceiling surface or recessed mount

### Electronics

- High temperature long life Ni-MH battery
- 120/277VAC 60Hz
- Standard Self-Diagnostics

### Approvals

- UL 924 listed
- Damp location 41°F to 104°F (5°C to 40°C)
- NYC Approved

### Warranty


- Unit has a three-year limited warranty
- Detailed warranty terms located on page 178 or online at:  
[www.emergi-lite.com/usa/files/EL\\_Warranty.pdf](http://www.emergi-lite.com/usa/files/EL_Warranty.pdf)

### EXIT sign on clear panel



### Photometric performance


|          | Spacing center-to-center (feet) |
|----------|---------------------------------|
| Lamp     | 7.5' mounting height            |
| AGC8-2HO | 30'                             |

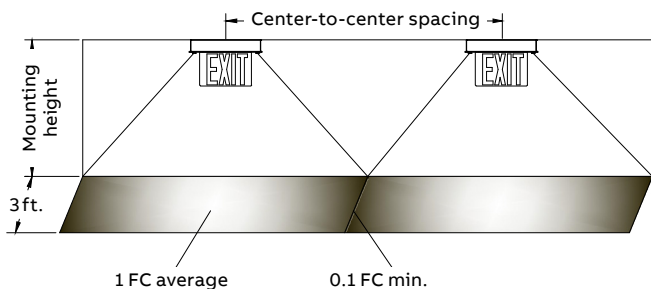


**Dimensions**

Dimensions are approximate and subject to change.


**Surface ceiling mount**

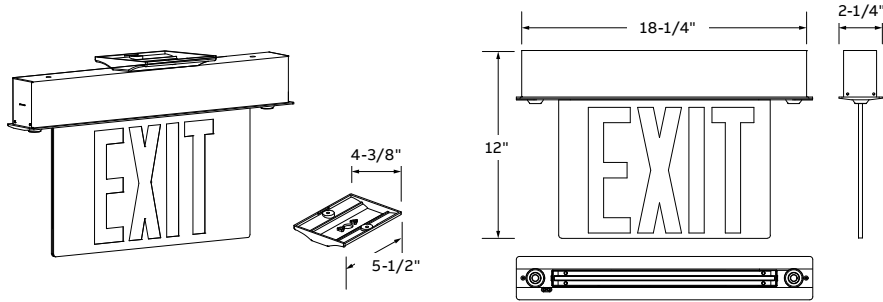


**Surface wall mount**

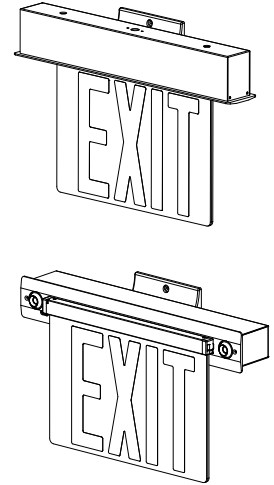

**Recessed mount**

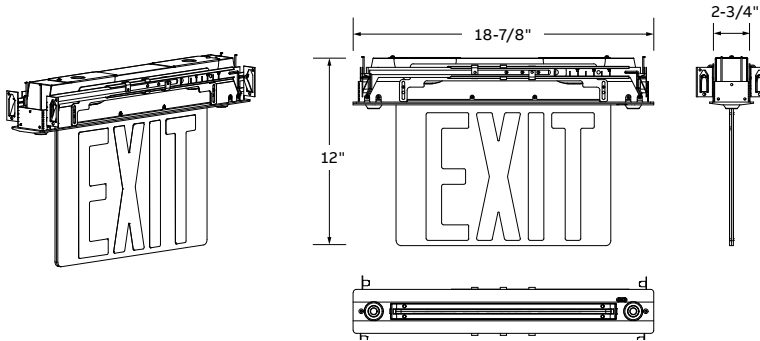

**Recessed wall mount**

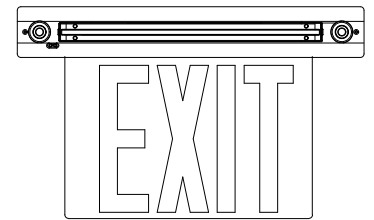

**Power consumption**

| Model    | AC specs         | Voltage | DC specs         |
|----------|------------------|---------|------------------|
| AGC8-2HO | 120/277VAC, 60Hz | 3.6V    | NI-MH SC 2500mAh |

**How to order**

| Model | Face/Arrow (Universal mounting) | Color                   | Input                          |
|-------|---------------------------------|-------------------------|--------------------------------|
| AGC8  | Blank= Universal faces          | Blank= Brushed aluminum | -2HO= 2 High output LED lights |

Example: AGC8-2HO